

CROSSBAR CYCLE STAND



Kent Crossbar Cycle Stand KCCS528

Specify:


Kent Crossbar Cycle Stand KCCS528; 528mm long; Grade 316L Stainless Steel; Bright Satin Finish; Visible Flange.

The Kent Crossbar cycle rack is constructed from Grade 316L Stainless Steel tube. The external finish of the cycle rack is Bright Satin as standard, 4 other finishes are available.

Features

- → Bright Satin
- → Grade 316L Stainless Steel
- → 40mm diameter
- Complete with horizontal mid bar
- -> Allows 2no. bicycles to be locked into position per stand
- → Various fixing options available
- → Various finishes available








Kent Crossbar Cycle Stand KCCS528



Product Dimentions:

Reference	Height	Width	Diameter
Kent Crossbar	700mm	528mm	40
Cycle Stand KCCS528			

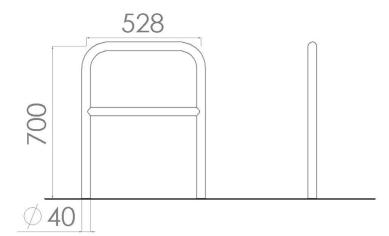

www.kentstainless.com

Visible Flange:


- Ensure that the surface to which the stand is mounted is to sufficiently strong.
- Position the stand in the correct location. Mark the holes and drill into the surface.
- Place the stand directly over the holes and then fix the stand to the surface using M12 bolts.


Buried Flange:

- \bullet Cast 2 foundations with minimum dimensions of L150 x W150 x D350mm below the surface.
- Once concrete is set follow steps 1-3 as per flange detail above.
- Fill hole with grout and replace slabs to finish of bollard

Cast In:

- Remove pavement and excavate 2 holes to minimum dimensions of L150 x W150 x D350mm.
- Position your stand in the correct position ensuring correct height and then prop the stand securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.

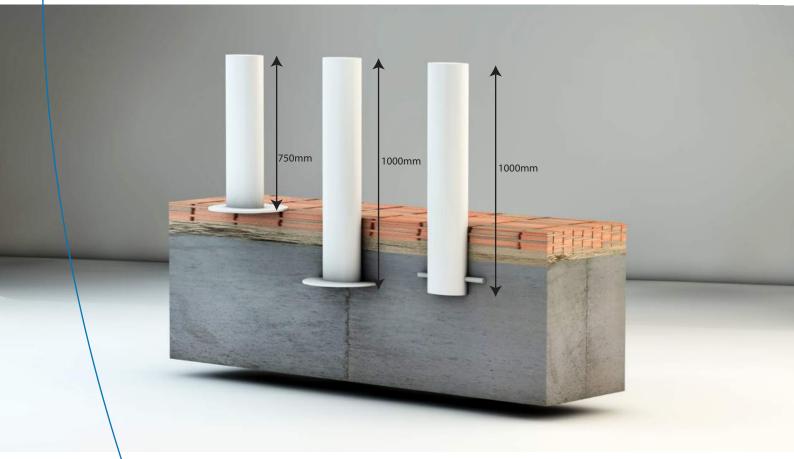

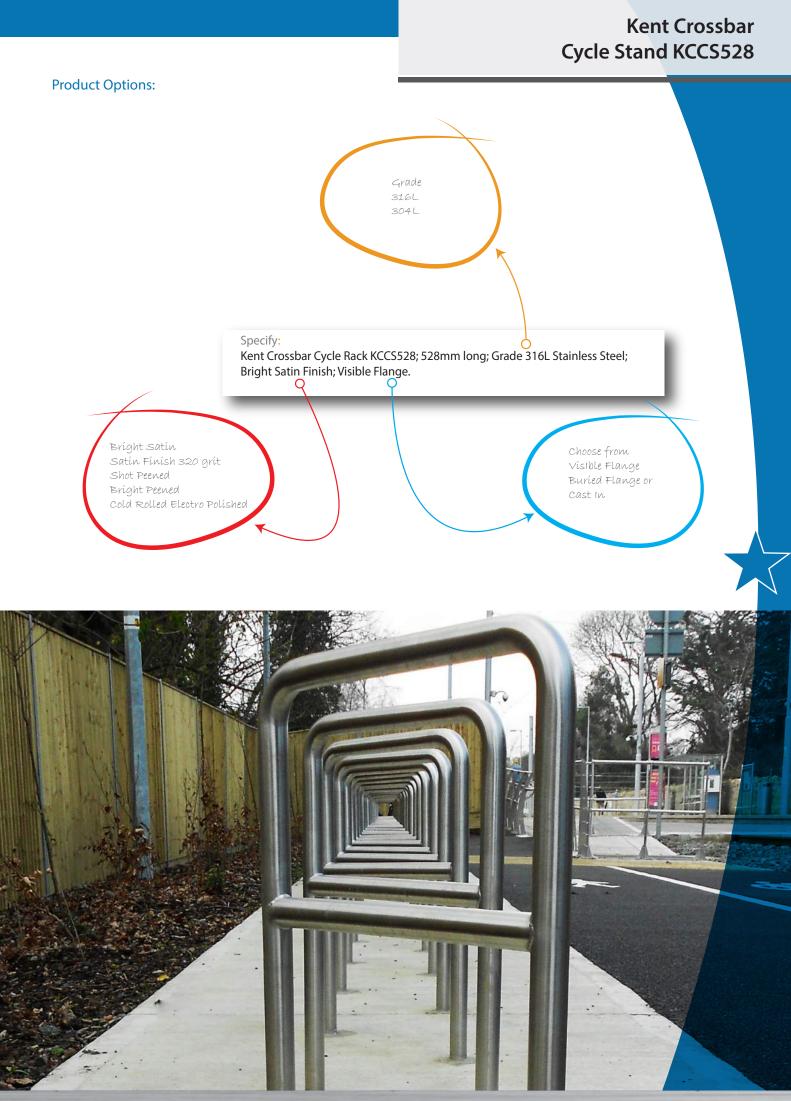

www.kentstainless.com

Kent Crossbar Cycle Stand KCCS528

Overview

The Kent Crossbar cycle stand is constructed from 316L grade stainless steel tube. The tube is 40mm diameter. The external finish of the cycle stand is a satin finish 320 grit polished, but is also available in bead blasted or electropolished finish. Despite the material's corrosion resistant properties some care is required to maintain a bright appearance. The location that the cycle stand is in a city or coastal area, will greatly increase the need for cleaning.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainlees steel cleaning products.