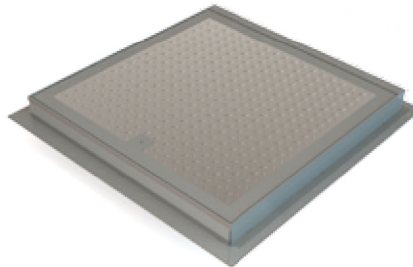



KENT HINGED SOLO CHEQUER KHSCHQ-600/600 continued

Product Code	Clear Opening	Tray Depth	Visible Frame Size (Unsealed)
KHSCHQ-600/600	600mm x 600mm	80mm	750mm x 750mm
KHSCHQ-750/600	750mm x 600mm	80mm	900mm x 750mm
KHSCHQ-750/750	750mm x 750mm	80mm	900mm x 900mm
KHSCHQ-900/600	900mm x 600mm	80mm	1050mm x 750mm
KHSCHQ-900/750	900mm x 750mm	80mm	1050mm x 900mm
KHSCHQ-900/900	900mm x 900mm	80mm	1050mm x 1050mm

Standard Safety Stay


Specify: Kent Hinged Solo Chequer Manhole KHSCHQ-600/600; 600mm x 600mm clear opening; 80mm Tray Depth; Unsealed; Grade 316L Stainless Steel; Loading FACTA B


Optional Safety Grid

OPTIONS

- Various Loadings (See BSEN124 and FACTA tables)
- Grade 304L Stainless Steel
- Grade 316L Stainless Steel
- Mild Steel Galvanised (In accordance with BS EN ISO 1461 (1999))
- Mild Steel Galvanised to 140 Micron (minimum requirement for Middle East projects)
- Unsealed or Double Sealed
- Various Tray Depths(50mm, 80mm,100mm)
- Safety Grid
- Gas struts (for smaller sizes)
- Kent lift assist Mechanical struts (for larger sizes)

BSEN124	Slow Moving Wheel Loads	Kent Safety Test (Unfilled)
A15	0.6T	1.5T
B125	5.0T	12.5T
C250	6.5T	25.0T
D400	11.0T	40.0T

FACTA Class	Slow Moving Wheel Loads	Kent Safety Test (Unfilled)
A	0.6T	0.8T
AA	1.5T	3.1T
AAA	2.5T	5.2T
B	5T	10.1T
C	6.5T	13.2T
D	11T	22T