

The KHA265/110DS Gully is a Round Body, Square Top/Side Outlet Gully for Heavy Duty Areas with High Flow Rates. It is an adjustable height version of our KV280 Gully and allows 65mm adjustment in height, full 360-degree rotation of top and tilt of up to 5 degrees. This is most important when the contractor may be uncertain of invert levels particularly in refurbishment projects.

They are designed for use primarily in Food/Beverage/Pharmaceutical factories. They can be used in both light-duty and very heavy duty trafficked areas (depending on the grating chosen). It has a Deep Swage as standard (DS = Deep Swage) and so takes all 25mm deep gratings offered by Kent (Perforated, Mesh, Factory Ladder, Heelproof Perforated and Slotted Gratings). When used with Heelproof Gratings it is suitable also for Civil Projects.

In most cases, a 110mm or 160mm outlet is required, but this can easily be substituted for a 4" or 6" SCH10 outlet pipe. It is trapped as standard with the Kent Weir Trap.

Features:

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Strong
- Short lead time
- Usable in both heavy and light duty areas
- Suitable for internal factory drainage

GRATING OPTIONS

FACTORIES



Perforated




Ladder




Mesh






Anti-slip Ladder




Anti-slip Mesh



Annular

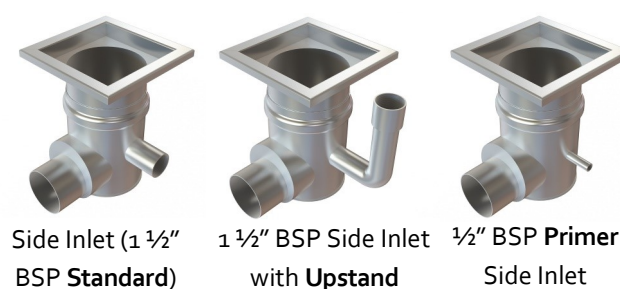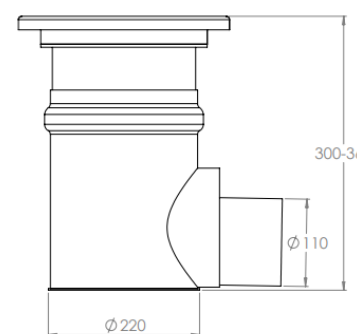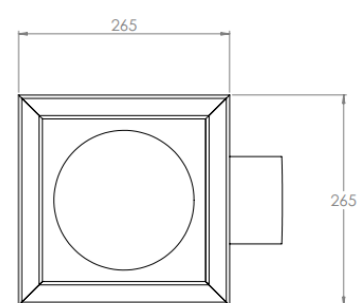

1 1/2" BSP Threaded Socket



50mm Pushfit



Concrete Ties

Custom Height up to 1 metre


Product Code	Height	Width	Diameter	Outlet	Swage	Flow Rate*
KHA265/110DS	300-365	265	220	110	25	7.30l/s
KHA315/110DS	300-365	315	270	110	25	7.30l/s
KHA415/160DS	350-390	415	370	160	25	14.00l/s

*flow rate is also dependent on grating chosen.

Specify: Kent KHA265/110DS trapped industrial gully; 265mm x 265mm; grade 304 stainless steel; complete with _____ grating.

Choose the product code from the dimensions table above.


Add specification options from the next page.

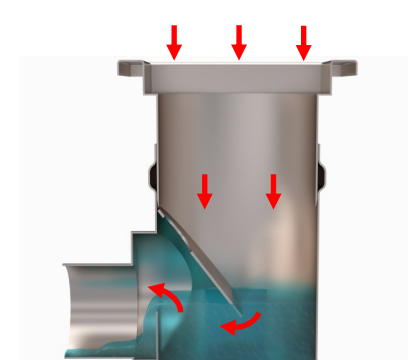


Waterflow



110mm Side Outlet Pipe as Standard



4" SCH10 Pipe Optional



Flanged Optional



Filter / Debris Basket

BS EN1253 Loading Class L15 / R50 / M125 / N250 / P400 (Choose one)

Our internal gullies can be subjected to very heavy loads but must have the correct heavy duty grating to achieve these loads. Suitable for Factories and Leisure Centres.

(BS EN1253 Gullies & Buildings)