



# Kent Slope Top Logo Bollard



# Kent Slope Top Logo Bollard KLB101/3

## Specify:

Kent Slope Top Logo Bollard KB101/3; 101mm diameter; 3mm Wall; Grade 316L Stainless Steel; Cold Rolled Electropolished Finish; Slope Top with Logo Disc Insert; With Diamond Reflector Strip; Cast In.


The Kent Logo Bollard KLB101/3 is a great cost effective way to add something a little unique to your scheme. Manufactured from 101mm diameter stainless steel with a 3mm thick wall, the Logo bollard has all the high specifications of our standard range of bollards. By adding your logo you are creating a product which is unique to your scheme – one of a kind! Logos come in 3 options – full colour, laser cut or laser etched. All you need to do is send us your high resolution jpeg, png, pdf or EPS file.

## Features:

- Cold Rolled Electropolished Finish
- Fish tails for added stability in concrete
- 30 degree slope top
- 3.05mm wall thickness
- Grade 316L Stainless Steel
- Cold Rolled Electropolished Finish



# Kent Slope Top Logo Bollard KLB101/3

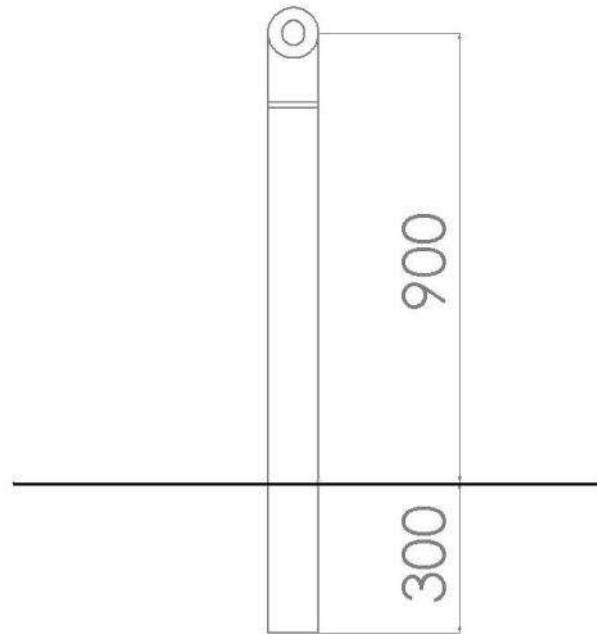

## Product Dimensions:

| Reference                             | Height | Diameter | Thickness |
|---------------------------------------|--------|----------|-----------|
| Kent Slope Top Logo Bollard KLB 101/3 | 1200mm | 101mm    | 3mm       |




## Stainless Steel Finishing Options

There are several finishing options to choose from when purchasing a Kent Bollard:

**Bead Blasted:** Our Bead Blasting Facility cleans Stainless Steel with a consistent finish throughout. Bead Blasting will leave welded joints and any abnormalities in the steel work with a clean and consistent finish. We also Bead Blast items that have been installed over a number of years that require refurbishment or cleaning

**Satin Finish 320 Grit Polished:** The removable tree grille is similar to the tree grille option except there is an added release mechanism which allows for access to the base of the tree by the removal of the grille.

**Electropolished:** Electropolishing removes surface material, beginning with the high points within the microscopic surface texture. By removing these points, the electropolishing process will improve the surface finish of a metal such as stainless steel, nickel, aluminium and hastelloy, leaving a smoother and more reflective surface.



# Kent Slope Top Logo Bollard KLB101/3

## Overview

The Kent Logo Bollard KLB 101/3 is a great cost effective way to add something a little unique to your scheme. Manufactured from 101mm diameter stainless steel with a 3mm thick wall, the Logo bollard has all the high specifications of our standard range of bollards. By adding your logo you are creating a product which is unique to your scheme – a one of a kind! Logos come in three options – Full colour, laser cut or laser etched. All you need to do is send us your high resolution JPEG, PNG or EPS file.

## Stainless Steel Maintenance


Clean the stainless steel components using warm water with a mild detergent with a non abrasive cloth or sponge. Heavier stains may require the use of a nylon scouring pad or a stainless steel cleaner. To remove paint or graffiti (or light concrete splashes) use a cloth and alkaline or solvent paint strippers according to type of paint. For Satin Finish Stainless try to follow the direction of the grain when cleaning vigorously or polishing. For Bead Blasted Finish use a circular motion. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Where contamination of the stainless has occurred from ordinary mild steel coming into contact with the stainless, use Rust Remover 410. In cases where the surface is severely stained as a result of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products





# Kent Slope Top Logo Bollard KLB101/3

## Our Range of Bollards

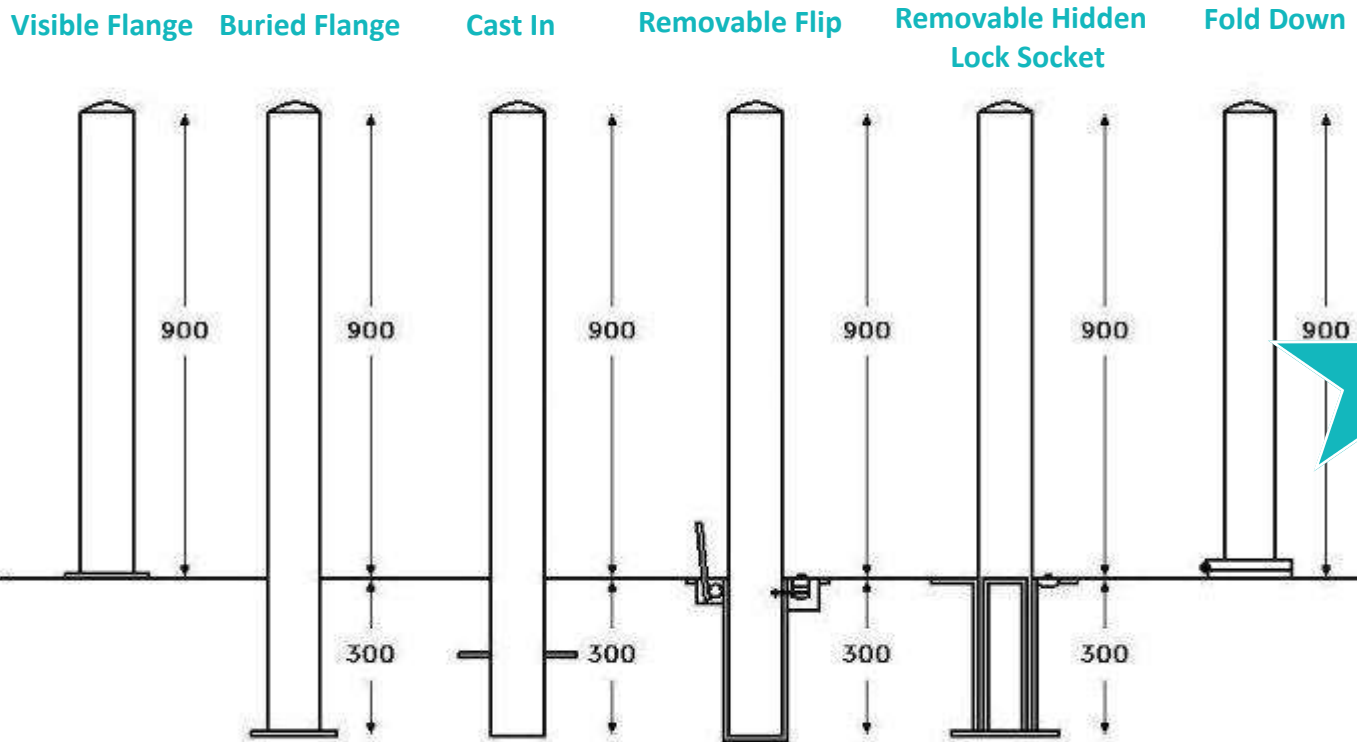

#### Bollard Installation

##### Visible Flange:

- Ensure that the surface to which the bollard is mounted is sufficiently strong.
- Position the bollard in the correct location. Mark the holes and drill into the surface.
- Place the bollard directly over the holes and then fix the bollard to the surface using M12 bolts.
- Note that fixings need to be fully embedded in concrete not just the paver blocks.
- Always consult with the engineers specifications—we recommend a minimum of 2 times the root length.

##### Buried Flange:

- Cast foundations—always consult with engineers specifications—we recommend a minimum of 2 times the buried root length ( $300\text{mm} \times 2 = 600\text{mm}$ ) and times the bollard diameter (eg  $3 \times 101\text{mm} = 303\text{mm}$ ).
- Once concrete is set follow steps 1-3 as per flange detail above.
- Replace slabs to finish off bollard.

##### Cast In:

- Cast foundations—always consult with engineers specifications — we recommend a minimum of 2 times the buried root length ( $300\text{mm} \times 2 = 600\text{mm}$ ) and 3 times the bollard diameter ( $101\text{mm} \times 3 = 303\text{mm}$ ).
- Position your bollard in the correct position ensuring correct height and then prop the stand securely. Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs and ensure that they are well bedded in.

##### Removable Hidden Lock Socket and Removable Flip Lid Socket

- Remove pavement in the location the bollard will be placed. Excavate a hole of minimum  $400\text{mm L} \times \text{W} \times \text{D}$ .
- Place socket of bollard into the hole ensuring the top surface of the socket meets the top surface of the pavement.
- Fill the hole with concrete leaving sufficient space for pavement.
- When set finish off pavement around socket and place bollard into the socket.



**Kent Slope Top Logo  
Bollard  
KLB101/3**

