

SLIMLINE BOLLARD



KENT SLIMLINE BOLLARD KSLB-75/1.5


Specify:

Kent Slimline Bollard KSLB-75/1.5; 1200mm Overall Height; 1.5mm thick wall; Grade 316L Stainless Steel; Bright Satin Finish; Cast in 300mm Below Ground.

Kent Slimline Bollard KSLB-75/1.5 is manufactured from Grade 316L Stainless Steel, 75mm diameter with a 1.5mm thick wall. It has a Bright Satin Finish as standard but can have 4 other finishes it has a pushfit dome cap. The standard length is 1200mm, with 300mm being cast below ground, giving 900mm above ground. The primary function of this bollard is to be an attractive deterrent or property demarcation. For stronger more robust deterrents please see our standard or anti – ram bollards.

Features

- Bright Satin Finish as Standard
- Grade 316L Stainless Steel 1.5mm thick 3mm thick
- Available as a cast in fixing
- Options of reflector strip tape

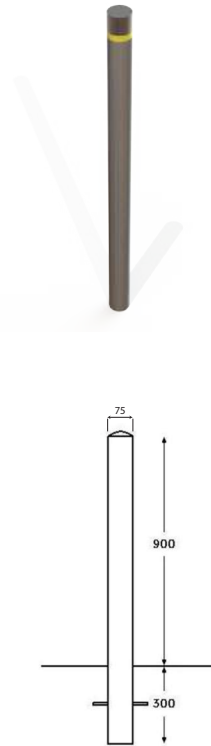


KENT SLIMLINE BOLLARD KSLB-75/1.5



Product Dimensions:

Reference	Height	Diameter	Wall thickness
Kent Slimline Bollard KSLB-75/1.5	1200mm	75mm	1.5mm

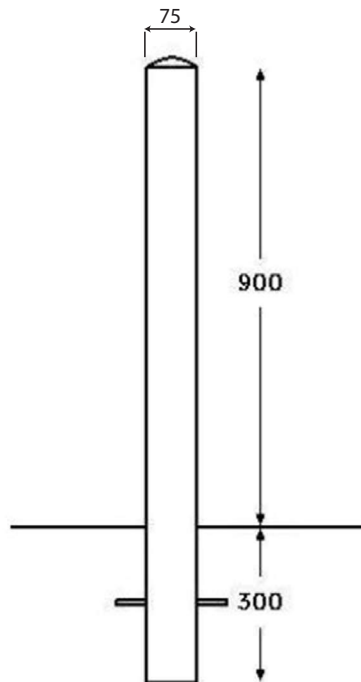

KENT SLIMLINE BOLLARD KSLB-75/1.5

Bollard Installation

Visible Flange:

- Ensure that the surface to which the bollard is mounted is sufficiently strong.
- Position the bollard in the correct location. Mark the holes and drill into the surface.
- Place the bollard directly over the holes and then fix the bollard to the surface using M12 bolts.
- Note that fixings need to be fully embedded in concrete not just the paver blocks
- Always consult with engineers specifications – we recommend a minimum of 2 times the root length and

Buried Flange:

- Cast foundations - Always consult with engineers specifications – we recommend a minimum of 2 times the buried root length ($300\text{mm} \times 2 = 600\text{mm}$) and 3 times the bollard diameter (eg $3 \times 101\text{mm} = 303\text{mm}$)
- Once concrete is set follow steps 1-3 as per flange detail above.
- Replace slabs to finish of bollard

Cast In:


- Cast foundations - Always consult with engineers specifications – we recommend a minimum of 2 times the buried root length ($300\text{mm} \times 2 = 600\text{mm}$) and 3 times the bollard diameter (eg $3 \times 101\text{mm} = 303\text{mm}$)
- Position your bollard in the correct position ensuring correct height and then prop the stand securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.

For Ram Raid Bollards again use consulting engineer's specification. Kent recommends minimum of 4 times the buried root length ($300\text{mm} \times 4 = 1200\text{mm}$) and 6 times the bollard diameter (eg $6 \times 101\text{mm} = 606\text{mm}$)

For Removable Bollards and Fold Down Coffin Bollards see their respective data pages



Product Options:

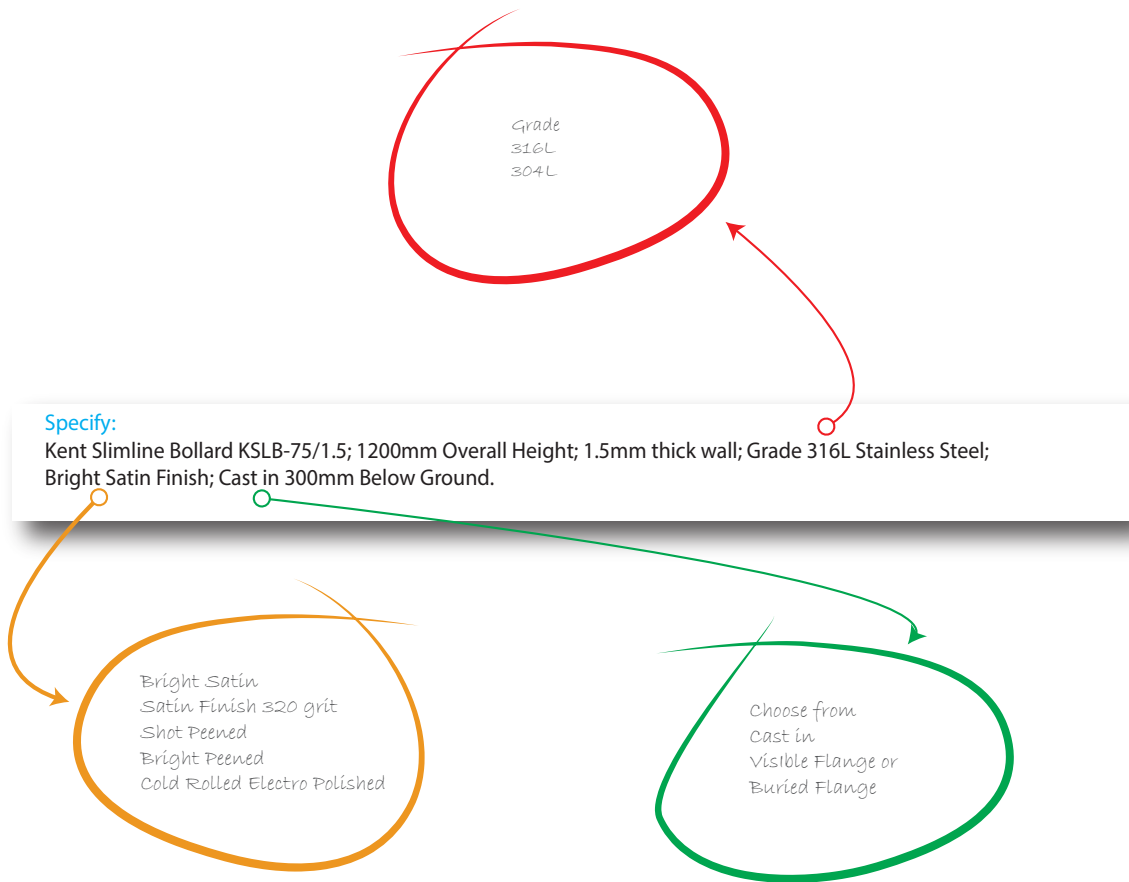

Accessories:

Reflector Strip Tape



KENT SLIMLINE BOLLARD KSLB-75/1.5

Overview


The Kent Slimline bollard KSLB-75/1.5 is a low cost bollard with a push fit cap. These bollards are for areas with little or no vehicular traffic (e.g. A raised kerb in a car dealership) and where damage risk is negligible. The stainless steel bollard is still an attractive delineation marker and has a high grade of stainless and polished finish, but with a thin wall of 1.5mm. While a lower specification than other Kent bollards, this is the standard many other manufacturers supply. This bollard is designed to compete on price when appearance and price are the overriding factors. Grade 316L stainless as standard and a Bright Satin Finish. Standard length 1200mm, with 300mm below ground leaving 900mm above ground.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products.

Our range of bollards

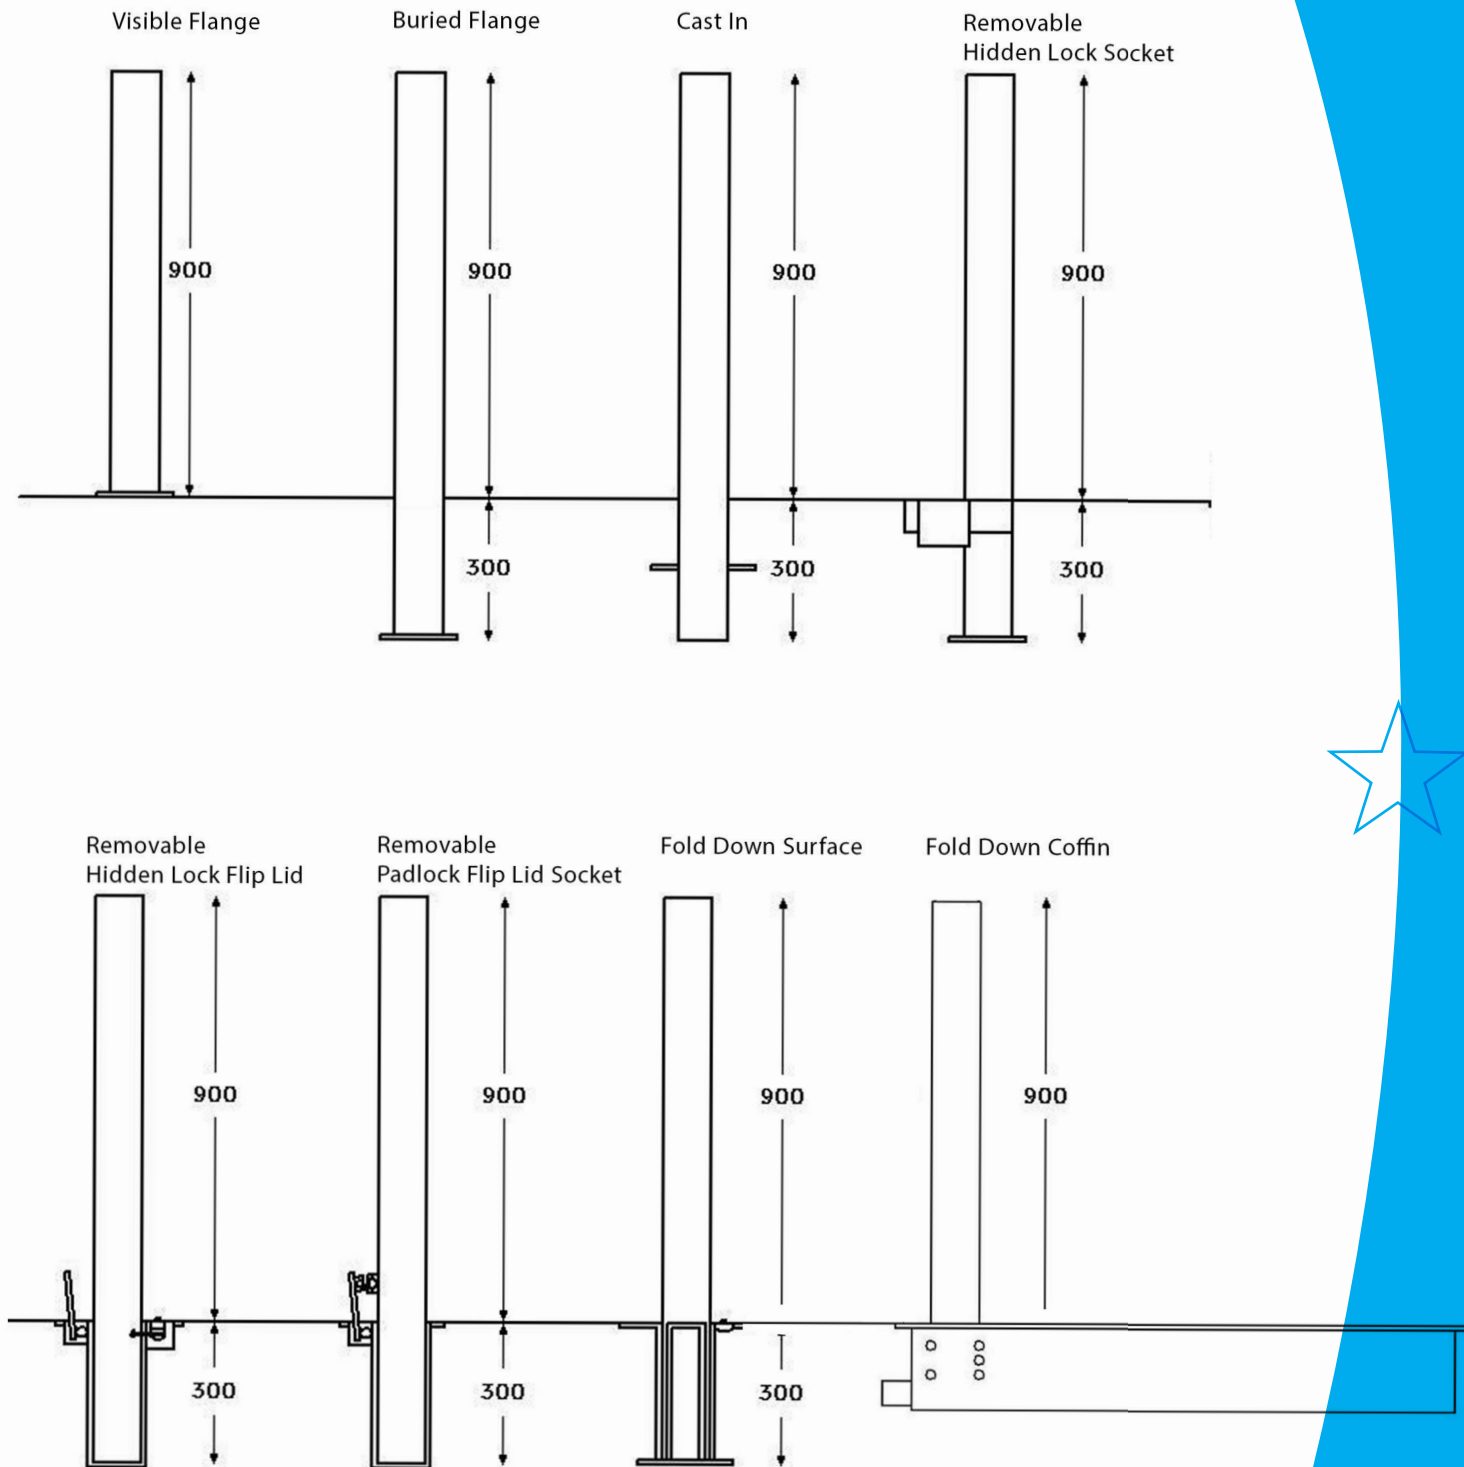



**KENT SLIMLINE
BOLLARD KSLB-75/1.5**

