

Stainless Steel Dished Tile Floor Drain Gully

The Kent KDTG150 Gully is a tile profile gully designed for insertion in a channel formed from dished tiles. It is supplied as standard with a lock-down perforated grating. The Foul Air Trap comes as standard with an optional Strainer.


The Height Adjustment Version, both bottom and side outlet, allows for optional flanges and side inlets to be included, simply specify any additional modifications required

It is most commonly ordered as 150mm square to match a 'Dorset Tile'. However 125mm x 245mm versions along with other radius versions to match other tiles can be supplied

Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088.
- Satin finish as standard
- Customised perforated patterns available
- Lock down as standard

Specify: Kent KDTG150/110TP Floor Gully. 150mm x 150mm, fixed height floor drain. Grade 304 stainless steel with a satin polish finish, supplied with KFT110 Trap.

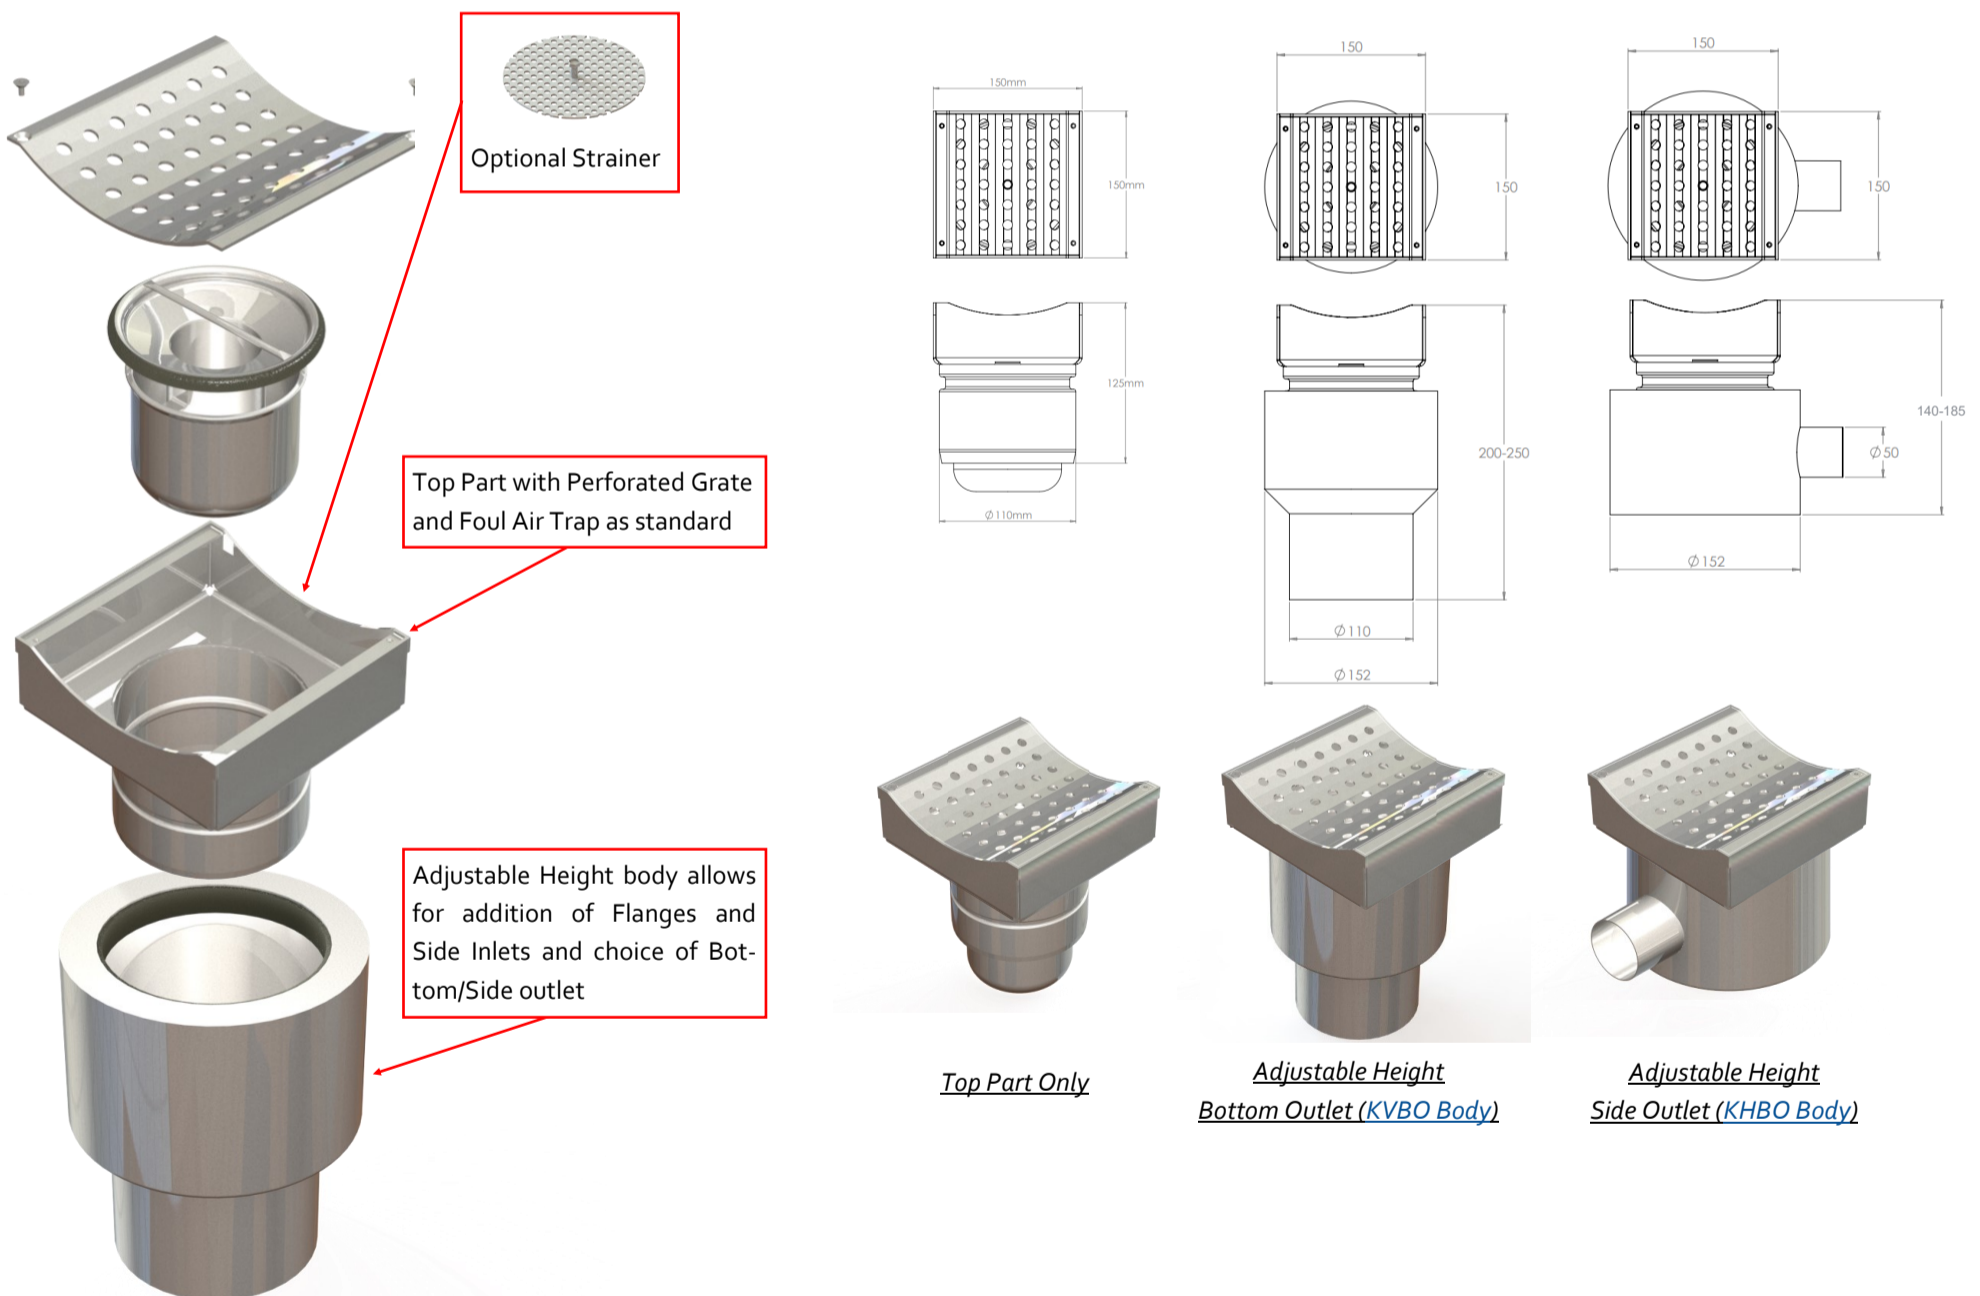

Product Code	Height	Width/Depth	Outlet	Description
KDTG150/110TP	125mm	150mm	110mm	Top Part Only Bottom Outlet
KDTG150/110	200mm-250mm	150mm	110mm	Adjustable Height 2 Part Bottom Outlet
KHDTG150/110	140mm-185mm	150mm	50mm	Adjustable Height 2 Part Side Outlet
KFT110				110mm Trap with 50mm water seal

BS EN1253 Loading Class K3
Suitable for Pedestrian and Barefoot Areas.

(BS EN1253 Gullies & Buildings)