


ALBION CYCLE STAND

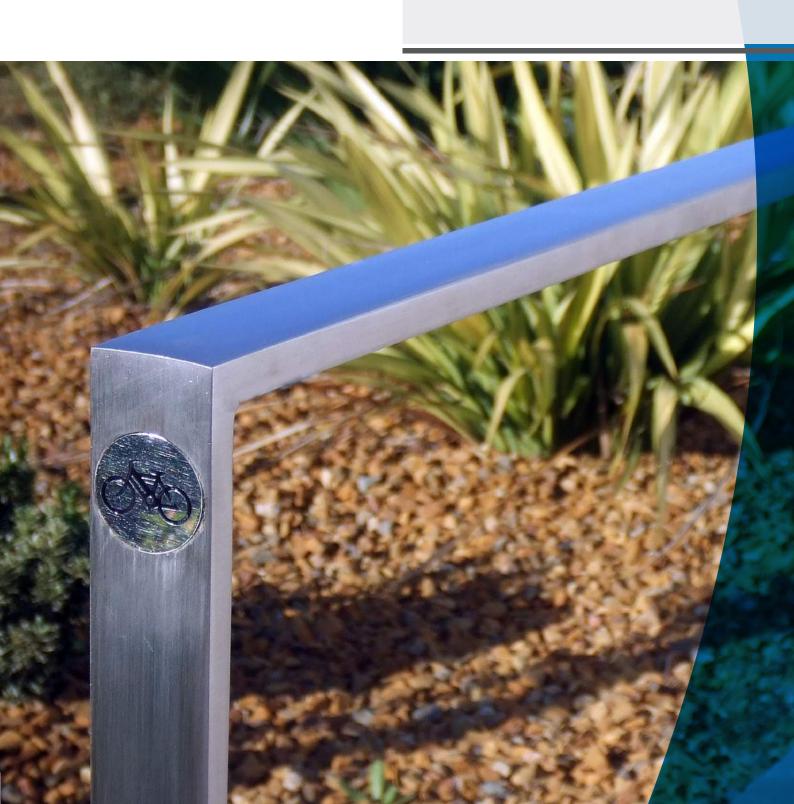

Kent Albion Cycle Stand KACS815

Specify:

Kent Albion Cycle Rack KACS815; 815mm long; Grade 316L Stainless Steel; Bright Satin Finish; Surface Mounted


The Kent Albion Cycle Rack is an 815mm wide by 875mm high Stainless Steel cycle rack. This cycle rack is solid bar manufactured from Grade 316L Stainless Steel throughout to maximise vandal resistance and minimise maintenance. The vertical end posts come with cycle symbols on either end as standard.


The design allows 2 no. Bicycles to be locked in position.



Features

- → Grade 316L Stainless Steel
- → 15mm thick flat bar
- Cycle symbols as standard




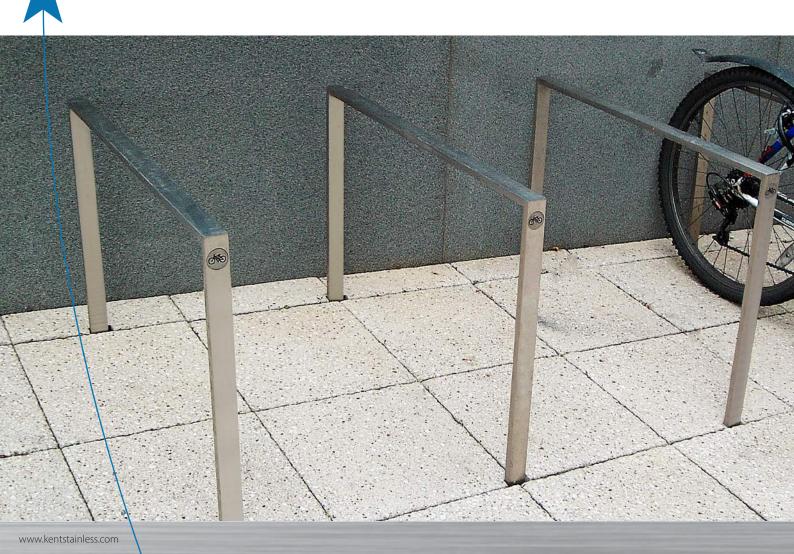



Product Dimentions:

Reference	Height	Width	Thickness
Kent Albion Cycle	875mm	815mm	50 mm x 20mm
Stand KACS875			

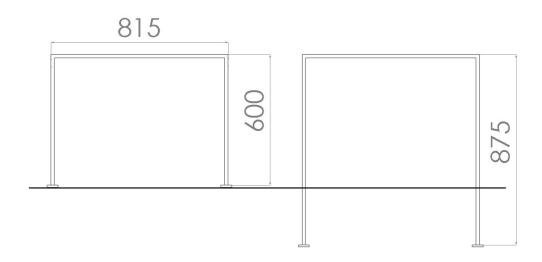

Kent Albion Cycle Stand KACS815

Visible Flange:

- Ensure that the surface to which the stand is mounted is to sufficiently strong.
- Position the stand in the correct location. Mark the holes and drill into the surface.
- Place the stand directly over the holes and then fix the stand to the surface using M12 bolts.

Buried Flange:

- Cast 2 foundations with minimum dimensions of L150 x W150 x D350mm below the surface.
- Once concrete is set follow steps 1-3 as per flange detail above.
- Fill hole with grout and replace slabs to finish of bollard


Cast In:


- Remove pavement and excavate 2 holes to minimum dimensions of L150 x W150 x D350mm.
- Position your stand in the correct position ensuring correct height and then prop the stand securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.





Product Options:

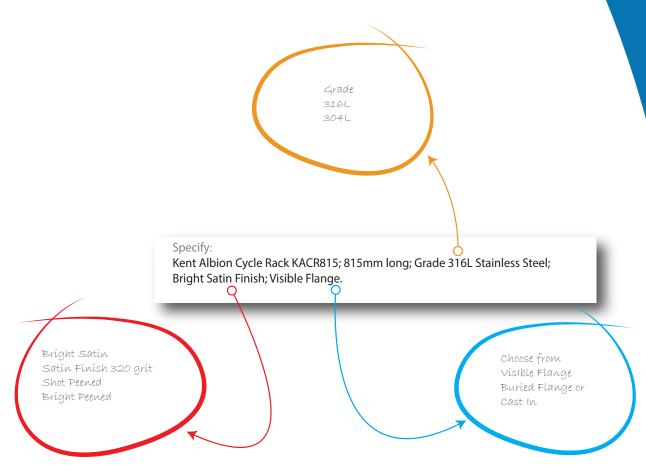

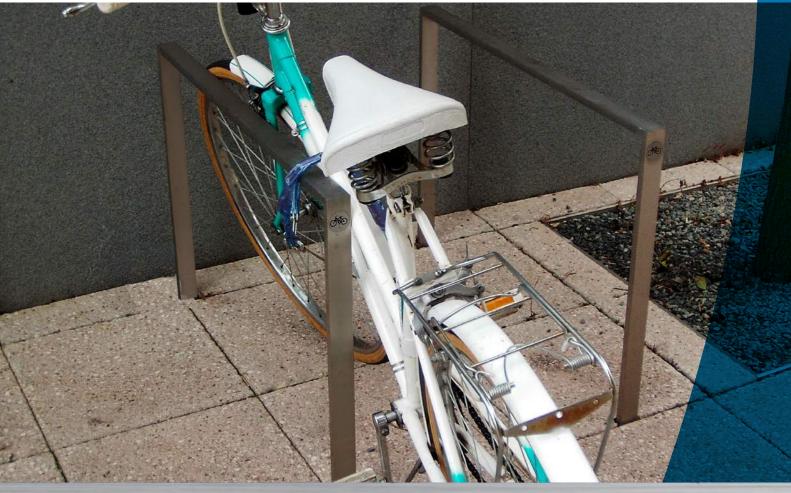

Kent Albion Cycle Stand KACS815

Overview

The Kent Albion Cycle Stand KACS815 is an 815mm wide by 875mm high stainless steel cycle stand. The Albion Cycle stand is manufactured from heavy duty stainless steel throughout to maximise vandal resistance and minimise maintenance. The vertical end posts come with cycle symbols on either end as standard.

The design allows 2 no. Bicycles to be locked in position.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products.