


# Kent Stainless

## Demarcation Stud

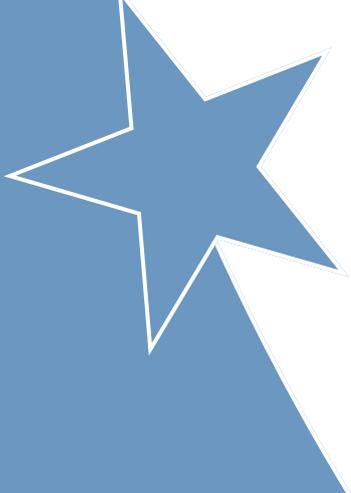

**Kent**  
STAINLESS

**Specify:**

Kent Demarcation Stud (KDS 25); Grade 316 Stainless Steel;  
Dia: 25mm, Height: 4mm; 1nr 6mm dia x 35mm high studs,  
Polished Finish;


**Description:**

Kent Demarcation Stud is used to de-lineate walk ways and site boundaries. The disc lies 4mm above the surface once installed or recessed to be flush with ground level .It is manufactured using Grade 316L Stainless Steel, this material is perfect for high-traffic pedestrian areas. It has an overall diameter of 25mm

**Features:**

- Grade 316 Stainless steel
- 4mm Thick Steel
- 25mm dia Disc
- Polished finish
- 1 Installation pins



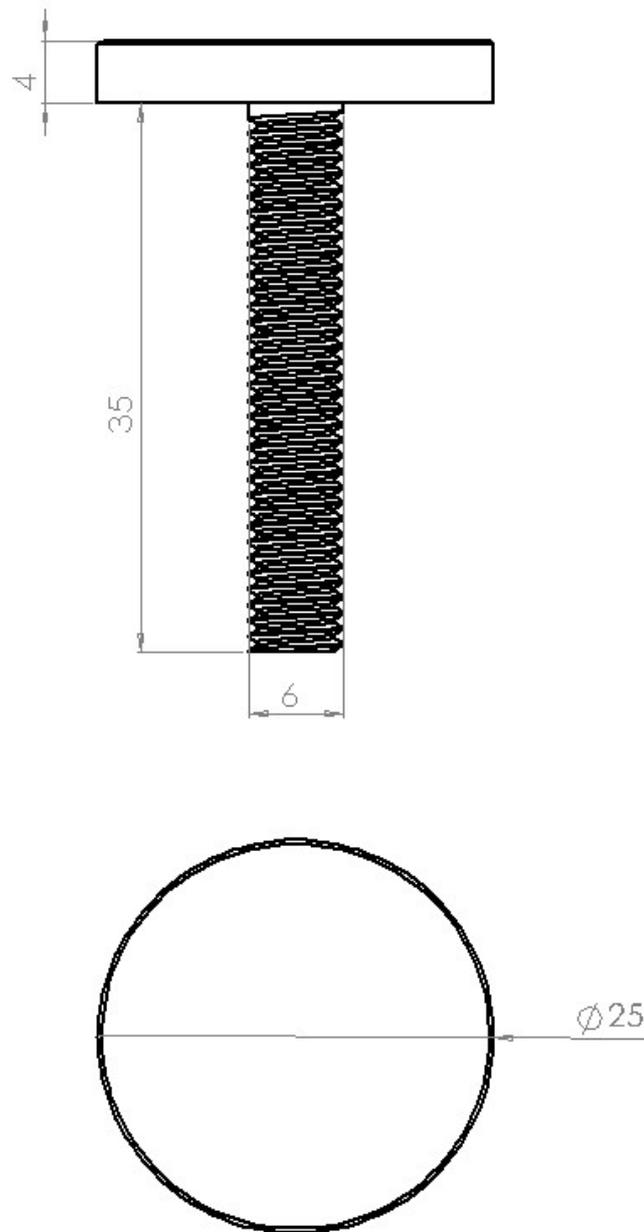

Product Code	Diameter	Height
Kent Demarcation Stud KDS 25	25mm	4mm
* Kent Demarcation Stud KDS 50	50mm	4mm
* Kent Demarcation Stud KDS 75	75mm	4mm
* Kent Demarcation Stud KDS 100	100mm	4mm

## Installation of Studs

### Step 1:

Drill x1 8mm Diameter hole 38mm deep.

(for flush installation drill a second recessed hole x26 diameter 4mm deep to accommodate the screw head)

### Step 2:


Clean out the drilled hole.

### Step 3:

Fill with chemical mortar (Kent Stainless recommend MIT-SE Mortar).

### Step 4:

Insert the Kent Demarcation Stud and leave to set for 24 hours

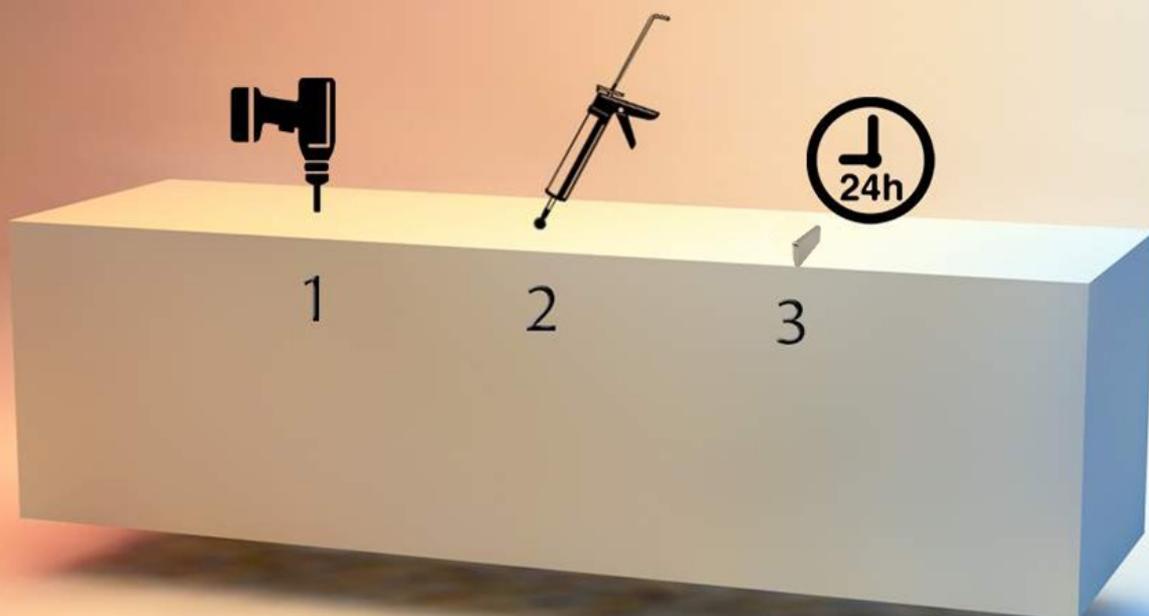

**Specify**

***Choose your steel:***

*Grade 304 Stainless steel*

*Grade 316 Stainless steel*

**Specify:**

Kent Demarcation Stud (KDS 25); Grade 316 Stainless Steel; Dia: 25mm, Height: 4mm; 1nr 6mm dia x 18mm high studs, Polished Finish;

***Choose your Size:***

*Standard 25mm dia*

*Bespoke 50,75 & 100mm dia*



## Maintenance of Stainless Steel

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner.

To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth.

In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water.

Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410.

In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish.



**Kent Stainless Ltd**

Ardcavan, Wexford, Ireland

**TEL NO:** +353 53 9143216

**UK FREEPHONE:** 0800 376 8377

**WEB:** [www.kentstainless.com](http://www.kentstainless.com)

**EMAIL:** [info@kentstainless.com](mailto:info@kentstainless.com)



**Kent**  
STAINLESS