



Stainless Steel Drain Cover and Frame Grade 304

The KF161 Gully Top is supplied as standard with a lockdown perforated grating and is trapped by a P bend or S bend elsewhere in the system. For trapped versions please see the KVT162/110TP gully. Use this gully for a low cost drain point where the outlet is trapped elsewhere.

Specify: Kent KF161 Floor Gully. 162mm x 162mm, floor drain. Grade 304 stainless steel with a satin polish finish.

Features:

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Satin finish as standard
- 110mm diameter outlet (short pressed outlet)
- Ex stock
- Lock down as standard

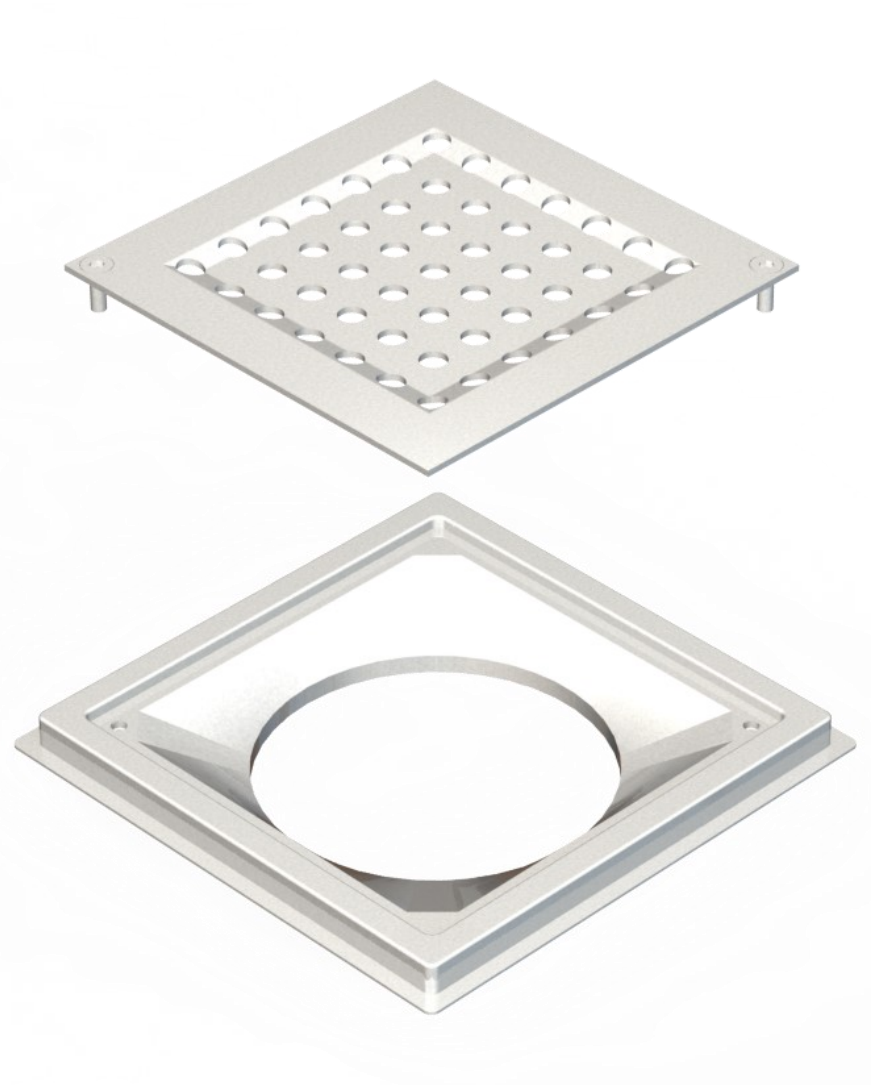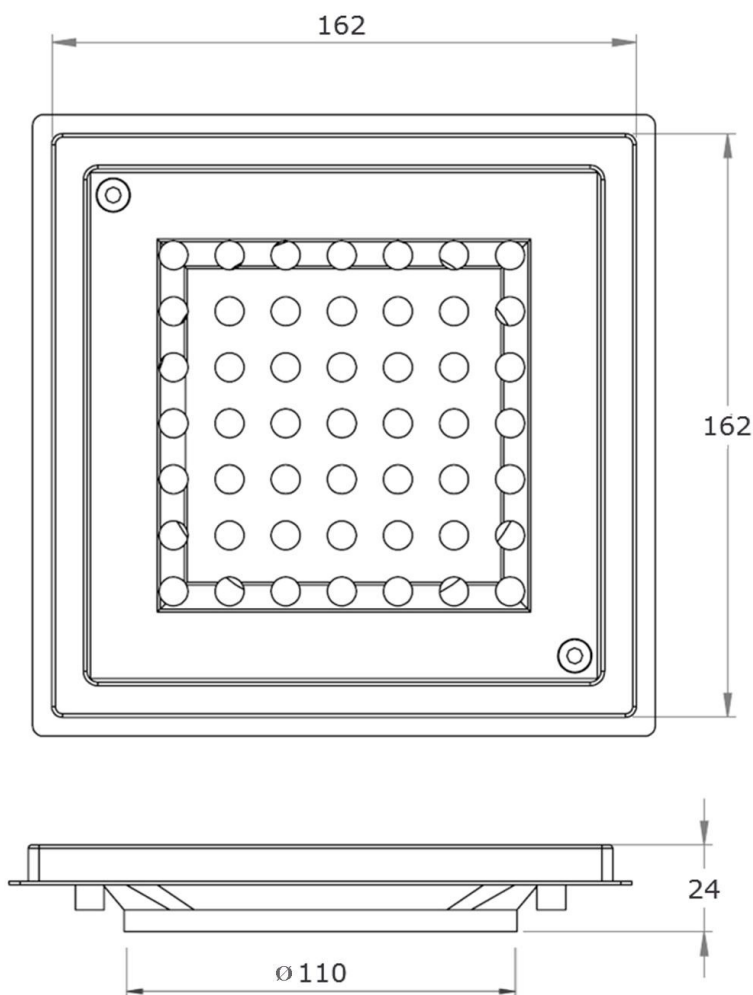

Product Code	Height	Width	Depth	Outlet	Flow Rate*
KF161	24	162	162	110	1.4 l/s

BS EN1253 Loading Class K3

Our internal gullies are suitable for Pedestrian and Barefoot areas.

(BS EN1253 Gullies & Buildings)