



Bromley Self Watering Planter



Kent Bromley Self Watering Planter KBSWP-600

Specify:



Kent Bromley Self Watering Planter KBSWP-600; 600mm overall height; 950mm overall width; Grade 3CR12 Stainless Steel; Powder Coated finish; Painted to RAL (TBA); 65 litre reservoir chamber.

The Kent Bromley Self Watering Planter KBSWP-600 is manufactured with 3CR12 Grade Stainless Steel. It has a Powder Coated finish as standard, that can be painted to any required colour. It is 600mm high and 950mm wide, with a 4mm thick wall. The planter comes equipped with a 65 litre water storage unit that lies under the large perforated sheet in the bottom of the planter, which allows the water to travel up through the soil by way of capillary action. It has a 100mm down pipe for filling the water reservoir with a perforated stainless steel removable cover.



Features

- Grade 3CR12 Stainless Steel
- Powder coated finish
- 4mm thick wall
- 65 litre water reservoir
- Manual filling option
- Environmentally friendly
- Low maintenance

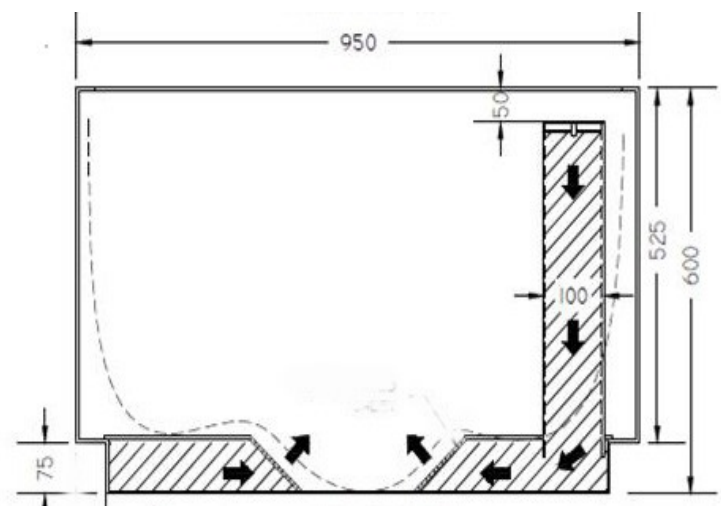
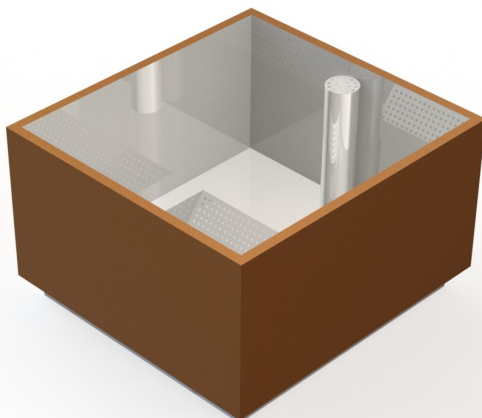


Kent Bromley Self Watering Planter KBSWP-600



Product Dimensions:

Reference	Height	Width	Diameter	Thickness
Kent Bromley Self Watering Planter KBSWP-600	600mm	950mm	950mm	4mm

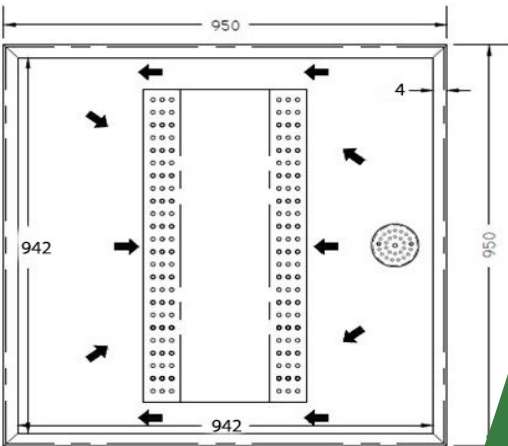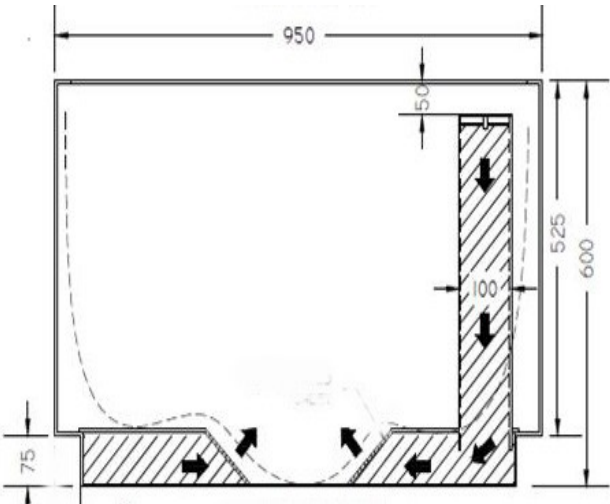

Kent Bromley Self Watering Planter KBSWP-600

Product Options

Grade

316L

304L

Specify

Kent Bromley Self Watering Planter KBSWP-600; 600mm overall height; 950mm overall width; Grade 3CR12 Stainless Steel; Powder Coated finish; Painted to RAL (TBA); 65 litre reservoir chamber.

Bright Satin

Satin Finish 320 Grit

Shot Peened

Bright Peened

Cold Rolled Electropolished

Overview

The Kent Bromley Self Watering Planter KBSWP-600 is manufactured with 3CR12 Grade Stainless Steel. It has a Powder Coated finish as standard, that can be painted to any required colour. It is 600mm high and 950mm wide, with a 4mm thick wall. The planter comes equipped with a 65 litre water storage unit that lies under the large perforated sheet in the bottom of the planter, which allows the water to travel up through the soil by way of capillary action. It has a 100mm down pipe for filling the water reservoir with a perforated stainless steel removable cover.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paints and strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or tea stains can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. As a provider for stainless steel products.



