



# NAAS BENCH



# Kent Naas Bench KNB1800 (C) or (S)

## Specify:

Kent Naas Bench Curved KNB 1800(C) or KNB 1800 (S); 1800mm long; Curved with 2350mm outside radius; Grade 316L Stainless Steel; Cold Rolled Electropolished Finish; Surface Mounted.

The Kent Naas Bench is an 1800mm long stainless steel bench. It is manufactured from heavy duty stainless steel throughout to maximise vandal resistance and minimise maintenance. The modular design allow for straight and curved sections to be combined to make curved and serpentine shapes.

Laser cut lettering is included as standard.




Customize your bench to show your own brand name or logo



Modular design allows you to create a curved seating area if required

## Features

- ❖ Cold Rolled Electropolished finish
- ❖ Grade 316L Stainless Steel
- ❖ Low maintenance
- ❖ Vandal resistance
- ❖ Straight and curved versions available
- ❖ Laser cut lettering


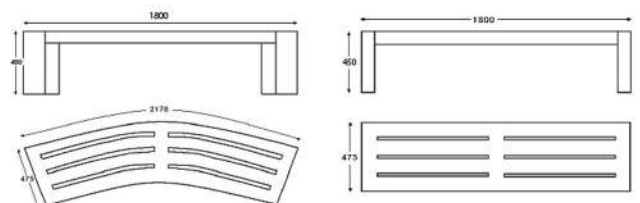


# Kent Naas Bench KNB1800 (C) or (S)



Product Dimentions:

| Reference                         | Height | Width | Length |
|-----------------------------------|--------|-------|--------|
| Kent Naas Bench KNB1800(S)        | 450mm  | 475mm | 1800mm |
| Kent Naas Bench KNB2000(S)        | 450mm  | 475mm | 2000mm |
| Kent Curved Naas Bench KNB2200(C) | 450mm  | 475mm | 2200mm |

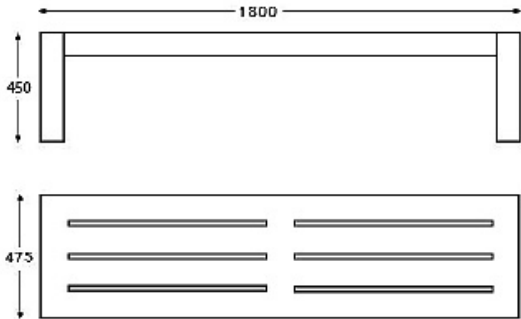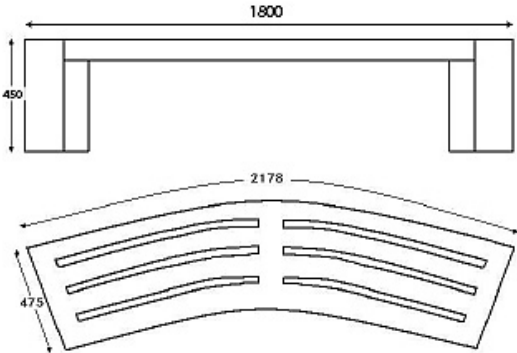

# Kent Naas Bench KNB1800 (C) or (S)

## Visible Flange:


- Ensure that the surface to which the bench is mounted is sufficiently strong.
- Position the bench in the correct location. Mark the holes and drill into the surface.
- Place the bench directly over the holes and then fix the bench to the surface using M12 bolts.

## Buried Flange:

- Cast a foundation 300mm with minimum dimensions of L350 x W750 x D350mm below the surface.
- Once concrete is set follow steps 1-3 as per flange detail above.
- Fill hole with grout and replace slabs to finish of bollard

## Cast In:

- Remove pavement and excavate a hole to minimum dimensions of L350 x W750 x D350mm.
- Position your bench in the correct position ensuring correct height and then prop the bench securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.

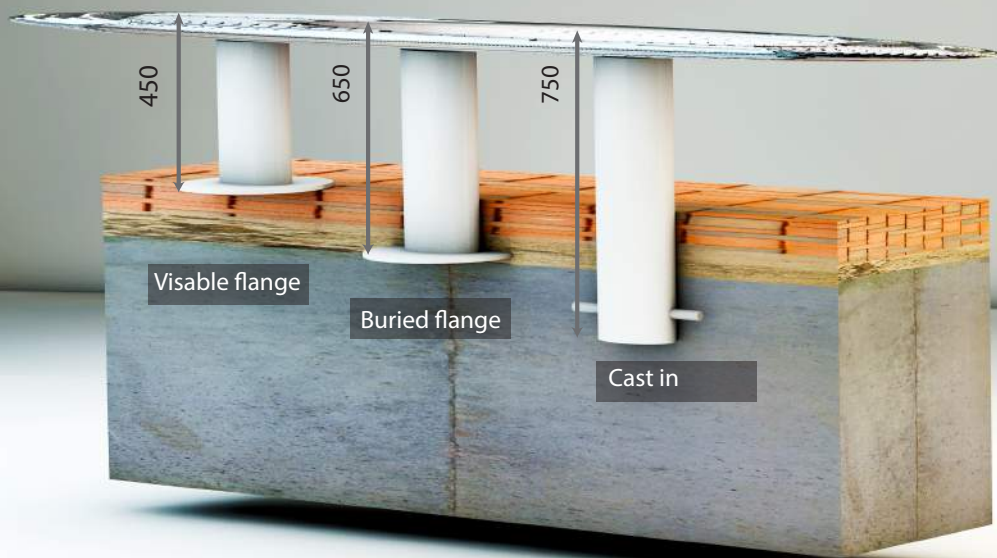

# Kent Naas Bench KNB1800 (C) or (S)

## Product Options:

Choose from 1800mm,  
or your custom size

Choose from grade  
304L or grade 316L  
stainless steel

### Specify:

Kent Naas Bench Curved KNB1800(C) or KNB1800(S); 1800mm long; Curved with 2350mm outside radius; Grade 316L Stainless Steel; Cold Rolled Electropolished Finish; Visible Flange.

Choose from  
Cold Rolled Electro Polished  
Satin Finish 320 grit  
Bright Satin  
Shot Peened or  
Bright Peened

Choose from  
Visible Flange  
Buried Flange or  
Cast In



# Kent Naas Bench

## KNB1800 (C) or (S)

### Overview

The Kent Naas Bench is an 1800mm long stainless steel bench. It is manufactured from heavy duty stainless steel throughout to maximise vandal resistance and minimise maintenance. The modular design allow for straight and curved sections to be combined to make curved and serpentine shapes. Laser cut lettering is included as standard.

### Maintenance

#### Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particularly in areas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finish using chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainless steel cleaning products.