

KENT LIGHT RAIL NOTICEBOARD



Specify:

Kent Light Rail Notice Board KLRNB1375; 1375mm Long; Grade 316L Stainless Steel; Bright Satin Finish; Buried flange


The Kent Light Rail Notice Board offers a stylish yet robust design, it provides a large display area whilst maintaining a small footprint. A Double Sided version is also available which also uses the same footprint. Please specify KLRNB1375 (DS). The posters and back board are protected from water ingress by a polycarbonate sheet and a rubber seal. For ease of use, the doors opens upwards on gas struts. This enables the posters to be easily replaced.

The notice board frame and surround comes supplied with a 50mm diameter tapping rail.



Features

- → Grade 316L Stainless Steel construction
- → PETG clearview polycarbonate protection
- → Integrated tapping rail
- → Robust stainless steel locks and hinges
- Gas ram driven doors










Gas Struts for safe & easy opening of door

Product Dimentions:

Reference	Height	Width	Diameter
Kent Light Rail Notice Board KLRNB1375	2000mm	1375mm	76mm







Visible Flange:

- Ensure that the surface to which the stand is mounted is to sufficiently strong.
- Position the pole in the correct location. Mark the holes and drill into the surface.
- Place the pole directly over the holes and then fix the pole to the surface using M12 bolts.

Buried Flange:


- Cast a foundation with a minimum dimension of L350 x W350 x D350mm below the surface.
- Once concrete is set follow steps 1-3 as per flange detail above.
- Fill hole with grout and replace slabs to finish of the pole

Cast In:

- Remove pavement and excavate a hole to minimum dimensions of L350 x W350 x D350mm.
- Position your pole in the correct position ensuring correct height and then prop the stand securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.





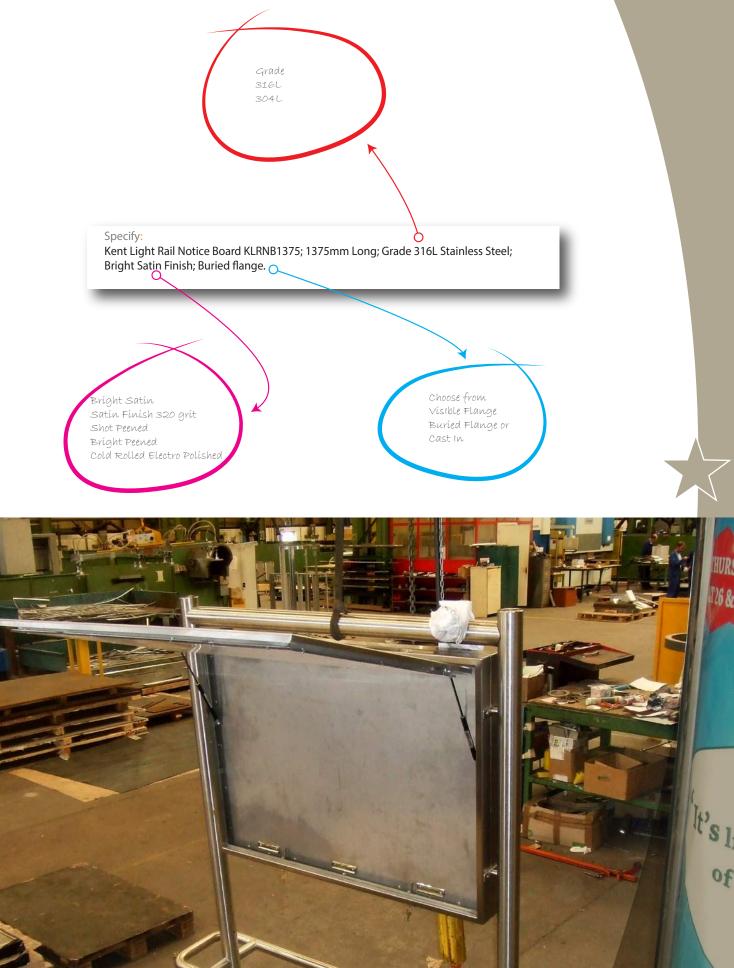

Overview

The Kent Light Rail Notice Board offers a stylish yet robust design, it provides a large display area whilst maintaining a small footprint. A Double Sided version is also available which also uses the same footprint. Please specify KLRNB1375 (DS). The posters and back board are protected from water ingress by a polycarbonate sheet and a rubber seal. For ease of use, the doors opens upwards on

gas struts. This enables the posters to be easily replaced.

The notice board frame and surround comes supplied with a 50mm diameter tapping rail.

Maintenance

Stainless Steel

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainlees steel cleaning products.

