



# Kent Light Rail RTPI Pole



# Kent Light Rail RTPI Pole

## Pole

### KL RTP 3000/3

#### Specify:

Kent Light Rail RTPI Pole KL RTP 3000/3; 3000mm Overall Height; 3mm Wall Thickness; 101mm Diameter; complete with tapping bar; Grade 316L Stainless Steel; Bright Satin Finish; Cast in

The Kent Light Rail RTPI Pole KL RTP 3000/3 poles offer a sturdy solution to the installation and mounting of RTPI (Real Time Passenger Information) display cases. The free-standing poles come in 3000mm lengths with a range of options available.

An integrated lockable door is provided as standard as well as a cable entry point. All poles supplied are load tested to ensure they deal with all types of weather conditions.

#### Features:

- Grade 316 stainless steel
- Cable entry point
- Integrated access door
- Vandal Resistant – minimum 3mm thick stainless steel throughout
- Heavy Duty Stainless steel pawl lock




Kent Light Rail RTPI  
Pole  
KL RTP 3000/3



Product Dimensions:

Reference	Height	Diameter
Kent Light Rail RTPI Pole KL RTP 3000/3	3000mm	101mm

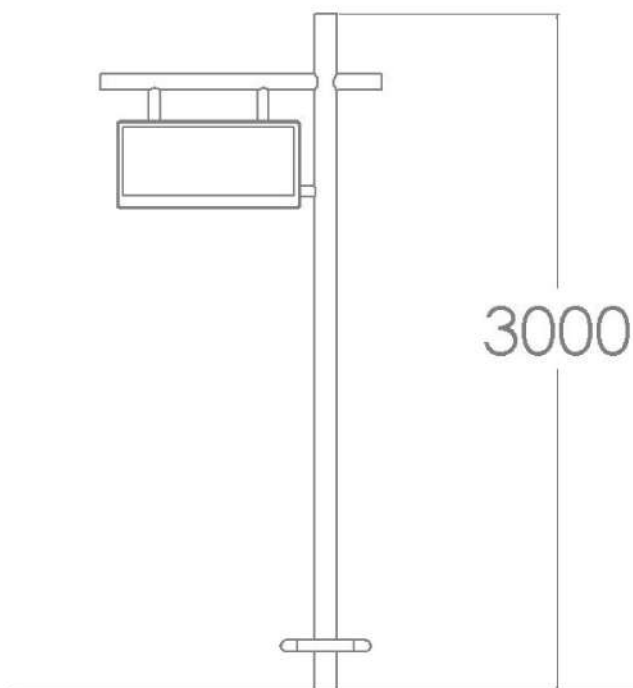

# Kent Light Rail RTPI Pole

## KL RTP 3000/3

### Overview

The Kent Light Rail RTPI KL RTP poles offer a sturdy solution to the installation and mounting of RTPI (Real Time Passenger Information) display cases. The freestanding poles come in 3000mm lengths with a range of options available.

An integrated lockable door is provided as standard as well as a cable entry point.

### Maintenance

#### How often?

For an area that receives regular rainfall that washes away the build up of salt deposits, cleaning should be done once a year. If rainfall cannot get to certain areas, but still salt and pollution deposits can blow onto it (e.g. the underside of a tram shelter) then cleaning should be done 1-2 times a year in urban environments and 3-4 times a year in marine environments. In a particularly severe environment with pollution and salt deposits and wind with little rainfall, cleaning should be done 4-12 times per year.

Judge your cleaning regime by the nearby glass panels or window cleaning and clean the stainless as often as the glass nearby.

#### How do I do it?

For regular cleaning, and for a preventative regime, a simple wipe down by soft cloth or sponge with a mild detergent is enough (e.g. 5% dilution of wash-up liquid). Rinse off with de-ionised water or bottled drinking water is fine if this is not readily available. Rub dry with a clean dry cloth rather than letting the product drip dry.

If staining does not disappear, switch the soft cloth to a pad of Scotchbrite™ from 3M™. Use the soapy water with Scotchbrite™ vigorously on areas that are unpolished or not architecturally important. For polished areas of products with a grain (e.g. Satin Finish 320 Grit Polish), rub gently forwards and backwards only in the direction of the grain direction so proceed with caution if this is an architecturally important feature.

Again – rinse with de-ionised water and dry with a soft cloth. For heavier staining or contamination by iron products Kent recommend Avesta cleaning chemicals. Cleaner Avesta 401™ can be used instead of the mild detergent as above. Avesta 420™ Fingerprint remover is a good cleaner to for areas prone to public fingerprints – it must be sprayed on and rubbed in while wet.

Pickling Gel Avesta 130™ (hazardous) and Passivator Avesta 630™ can be used for large, important features, but these should be discussed and a method statement is available from Kent Stainless for their use. This work can be sub-contracted to Mister Stainless™ in Ireland and Edimex™ in Dubai.

Kent Light Rail RTP1  
Pole  
KLRTP 3000/3

