

lusail Advertising Screen

OutryCENTREDoha Centre825Al Najada0PENAl Ghanim425Al SoudSPACES

Specify:


Kent Lusail Advertising Screen KLAS1900; 1900mm Long; Grade 316L Stainless Steel; Bright Satin Finish; Cut-out to take 1560 x 800mm video screen; Buried Flange.

The Kent Lusail Advertising Screen is an excellent revenue generator, as well as an easy way to transmit information in various locations including roadside, platforms and reception areas. The integrated electronic LED display supplied by others can be easily connected to a network for easy updating to keep "up to the minute" information on display. The display can be static, video, and text only.



Features

- --> Single sided, Stainless Steel construction throughout
- -> Vandal resistant locks and hinges
- → Laser cut wording & logos, back-lit with LED's








Product Dimentions:

Reference	Height	Width	7
Kent Lusail Advertising Screen KLAS1900	2000mm	1900MM	

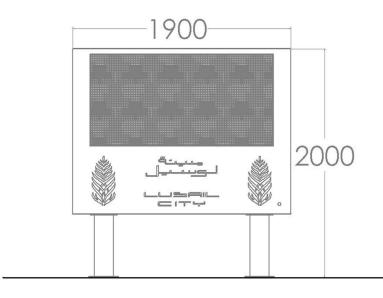

Visible Flange:

- Ensure that the surface to which the stand is mounted is to sufficiently strong.
- Position the pole in the correct location. Mark the holes and drill into the surface.
- Place the pole directly over the holes and then fix the pole to the surface using M12 bolts.

Buried Flange:

- Cast a foundation with a minimum dimension of L600 x W600 x D600mm below the surface.
- Once concrete is set follow steps 1-3 as per flange detail above.
- Fill hole with grout and replace slabs to finish of the pole

Cast In:

- Remove pavement and excavate a hole to minimum dimensions of L600 x W600 x D600mm.
- Position your pole in the correct position ensuring correct height and then prop the stand securely.
- Fill the hole with concrete up to the level of the underside of the pavement ensuring a good smooth surface finish.
- Remove props, replace the paving slabs, and ensure that they are well bedded in.



Product Options:



www.kentstainless.com

Overview

The Kent Lusail Advertising Screen is an excellent revenue generator, as well as an easy way to transmit information in various locations including roadside, platforms and reception areas. The integrated electronic LED display supplied by others can be easily connected to a network for easy updating to keep "up to the minute" information on display. Display advertising can be static, video and text only.

Maintenance

Stainless Steel

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainlees steel cleaning products.

