

## KENT HEELPROOF SLOTTED GRATING

Kent Heelproof Slotted Gratings have laser cut patterns which are usually oblong slots which typically provide heelproof slots but can also have decorative laser cut patterns allowing a high flow rate. These are customised to suit other light duty or heavy duty traffic areas. For light areas, with narrow width channels the gratings are 3mm or 4mm thick. For heavy areas or wider channels the grating is 6mm – 8mm thick. This grating suits all of the KSBC range of drainage channels, the Kent Industrial Gully range and often is supplied just with Angle Frame(KAFG200). It is an excellent choice for areas which have regular heavy traffic.

Complies with EN1433.





**Heelproof**

**Specify: Kent Heelproof Slotted Grating KHPSG150; 150mm wide x 1000mm long x 4mm thick; Grade 304L Stainless Steel; Satin Finished; Load Class B**  
 See page 8 & 9 which shows how to create your own unique specification clause



**Standard is  
6mm and 12mm  
centres**

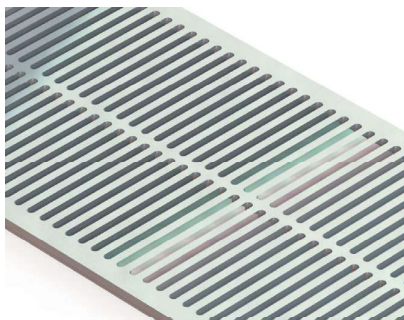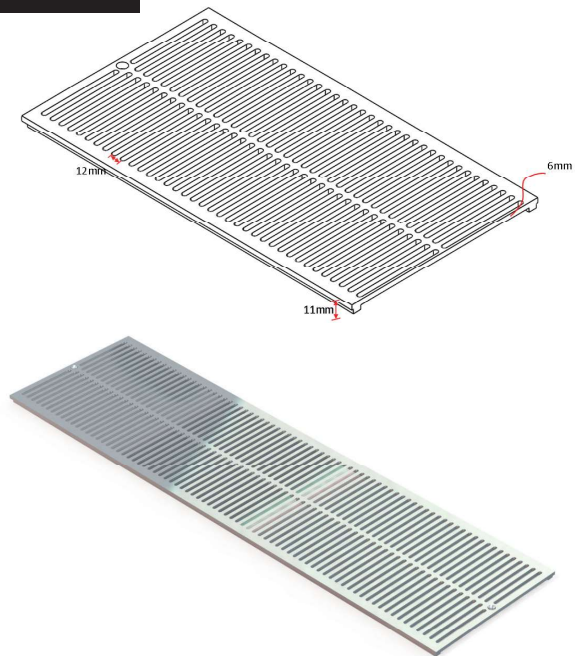

**Variation can be  
6mm and 18mm  
centres**



### Typical Dimensions

Name	Thickness	Bar	Gap	Free Area
KHPSG150	3	6	3	60%
	4	6	6	43%