



KENT STAINLESS: GIKF— Basement Freestanding Stainless Steel Grease Interceptor

Kent Stainless Grease Traps are found in practically all foodservice projects in Ireland. Huge customised versions in hotels, hospitals, office buildings and standard stock sizes in takeaways, petrol stations, CTNs and other retail outlets with serving counters.

This all Stainless Basement Freestanding Grease Trap is most often used in basement catering kitchens for very large volume venues. These are often installed underground in large corporate office headquarters, hospitals, prisons.


Extra large customised sizes are manufactured to suit exact site conditions. In existing buildings where the grease trap size exceeds the practical size of an entry to the underground area we split the large units into 1-2-3 or 4 parts for assembly underground in the basement.

Recommended for:

- > NS40 Corporate Office Blocks, Hotels, Hospitals
- < NS 20 Hotels, Hospitals, Stadiums

Features




- Stainless steel
- Easy to remove cover
- Sampling point for testing (if required)
- Freestanding

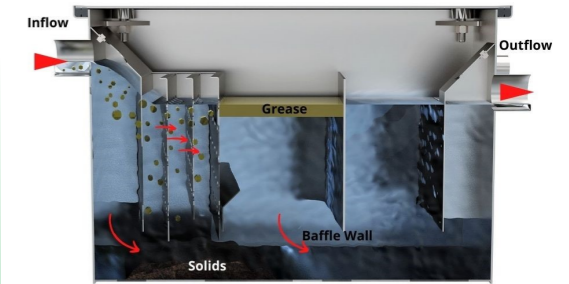

Basement Free-standing Grease Interceptor custom built to fit basement room size, or to fit doorway or lowering through an access hatch. They can be delivered in 2-3 pieces for assembly on-site. They are fitted onto drainage systems to remove FOGs (Fats, Oils & Greases) from the system. As FOGs cool, they clog and block the drains creating issues in the future.

Internally, the large first baffle slows the water down. This will help the discharge to cool enough for the grease to lose momentum and rise to the surface of the water. The perforated baffles also helps food particles to separate from the water and the FOGs, and to settle on the bottom.

With the food particles settling on the base, and the grease trapped on the surface behind the last baffle wall, grease is prevented from entering the waste discharge.

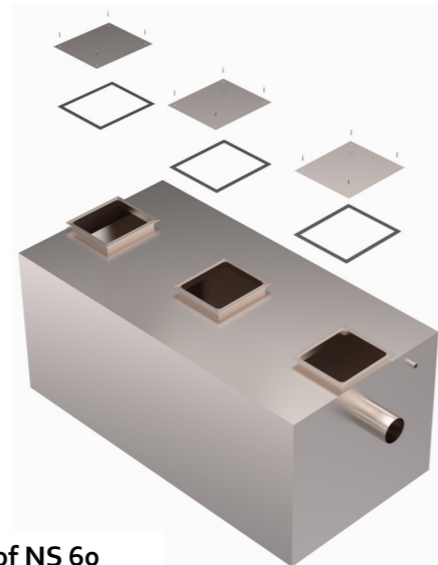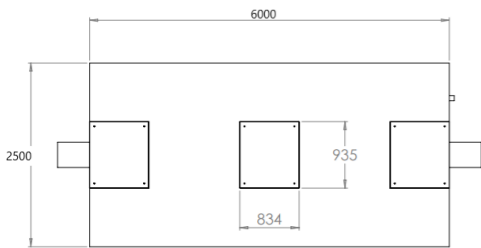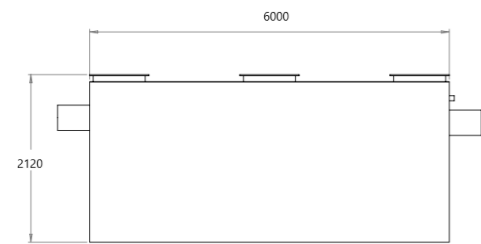


Example of NS 60

Kent Model	Nominal Size	Sludge Trap	Grease Capacity	Filled Volume	Length	Width	Height*	Pipe
GIKF 9520	7	700L	280L	989L	1560	1060	1010	160
GIKF 9530	10	1000L	400L	1702L	1780	1240	1190	160
GIKF 9540	15	1500L	600L	2278L	1768	1272	1454	160
GIKF 9550	20	2000L	800L	6800L	4000	1250	2120	160
GIKF 9580	40	4000L	1600L	13600	5000	2000	2120	220
GIKF 9590	55	5500L	2200L	18700	7000	2000	2120	220
GIKF9600	60	6000L	2400L	20400	6000	2500	2120	220
GIKF 9610	65	6500L	2600L	22100	7000	2500	2120	220

NS 7 - NS 65
280 Litre - 2600 Litre & above Grease Capacity

NS 60 is our most popular size from this range

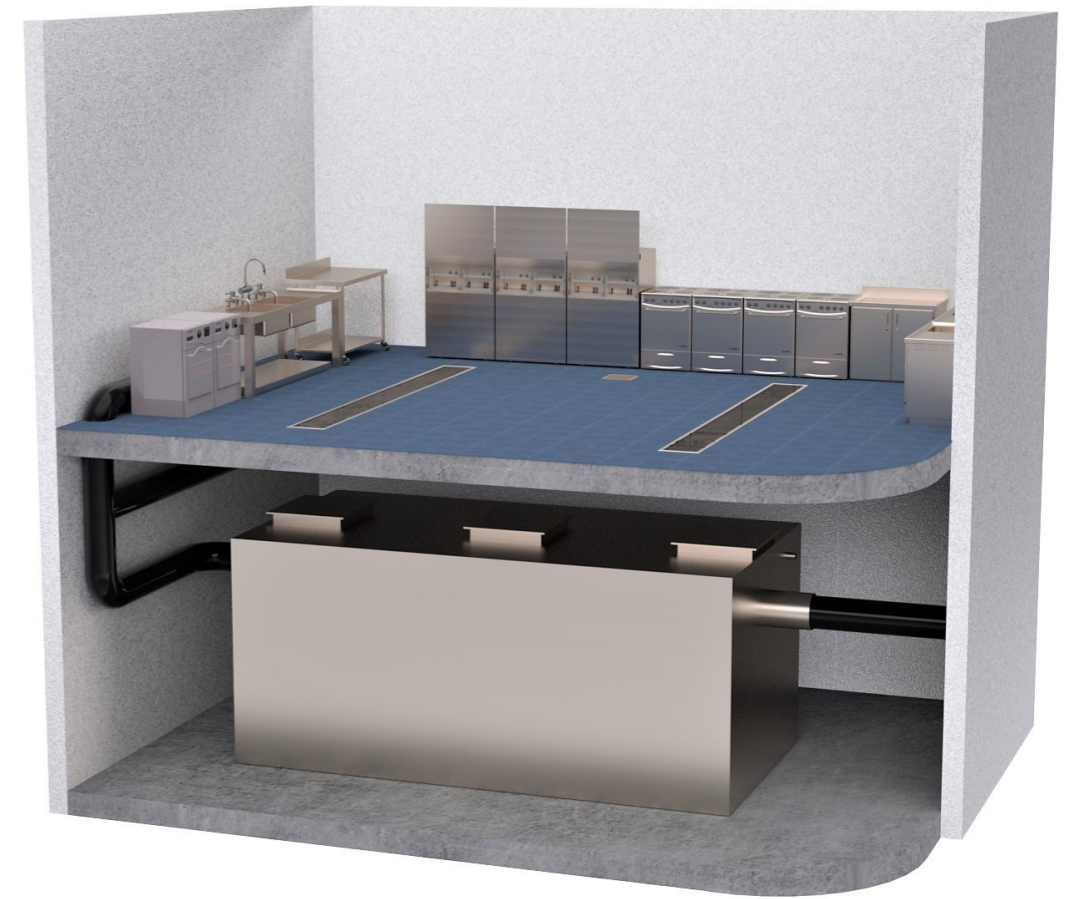

Specify: Kent GIKF9600 Freestanding Basement Grease Interceptor. Nominal Size NS60. 6000mm x 2500mm x 2120mm (h); Grease Capacity 2400L; Sludge Capacity 6000L. Grade 304 Stainless Steel. Lockdown Cover Non Trafficked.

* Amend underlined words to suit project

