



Kent
STAINLESS

KENT STAINLESS: GIKF - Under-Sink Freestanding Stainless Steel Grease Interceptor

Kent Stainless Grease Traps are found in practically all food service projects in Ireland. Huge customised versions in hotels, restaurants, takeaway food premises, motorway stops, hospitals, office buildings and standard in petrol stations, CTN's and other retail outlets with serving counters.

Because this unit is not typically recessed into the ground, the top cover is generally not made for traffic loading and will have sealed removable cover.

This unit has an easy to remove cover which is secured in place and is locked down. A specially designed sampling point on the outlet can be supplied if requested so that water leaving the unit can be tested at any time.

Recommended for :


Small Hotels, Garage Forecourts & Coffee Shops

NS 2 is our most popular size from this range

Features

- Stainless steel
- Easy to remove cover
- Sampling point for testing (if requested)
- Freestanding

NS 1 - 2
40 Litre—80 Litre Grease Capacity

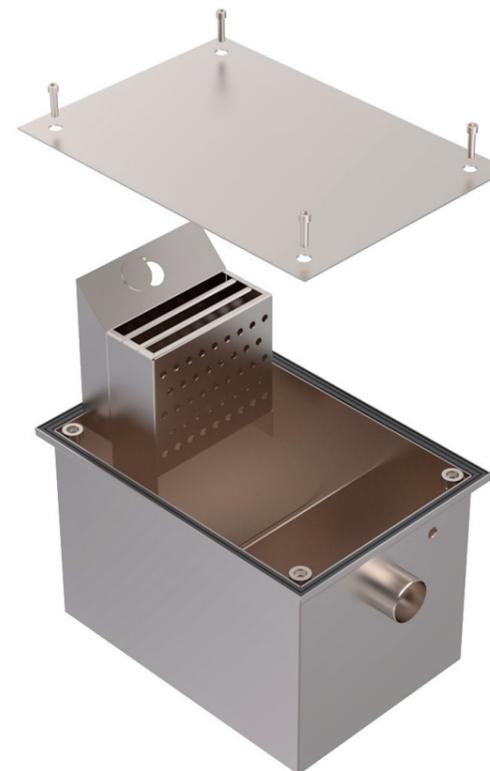



Sealed Freestanding Grease Interceptor for use in pre-existing buildings, retrofitted onto drainage systems to remove FOGs (Fats, oils & greases) from the system. As FOGs cool, they clog and block the drains creating issues in the future
Not pictured: Optional Dosing intake pipe for active grease traps.




Internally, the large first baffle slows the water down. This will help the discharge to cool enough for the grease to lose momentum and rise to the surface of the water. The perforated baffles also helps Food Particles to separate from the Water and the FOGs, and to settle on the bottom



With the food particles settling on the base, and the grease trapped on the surface behind the last baffle wall, grease is prevented from entering the waste discharge

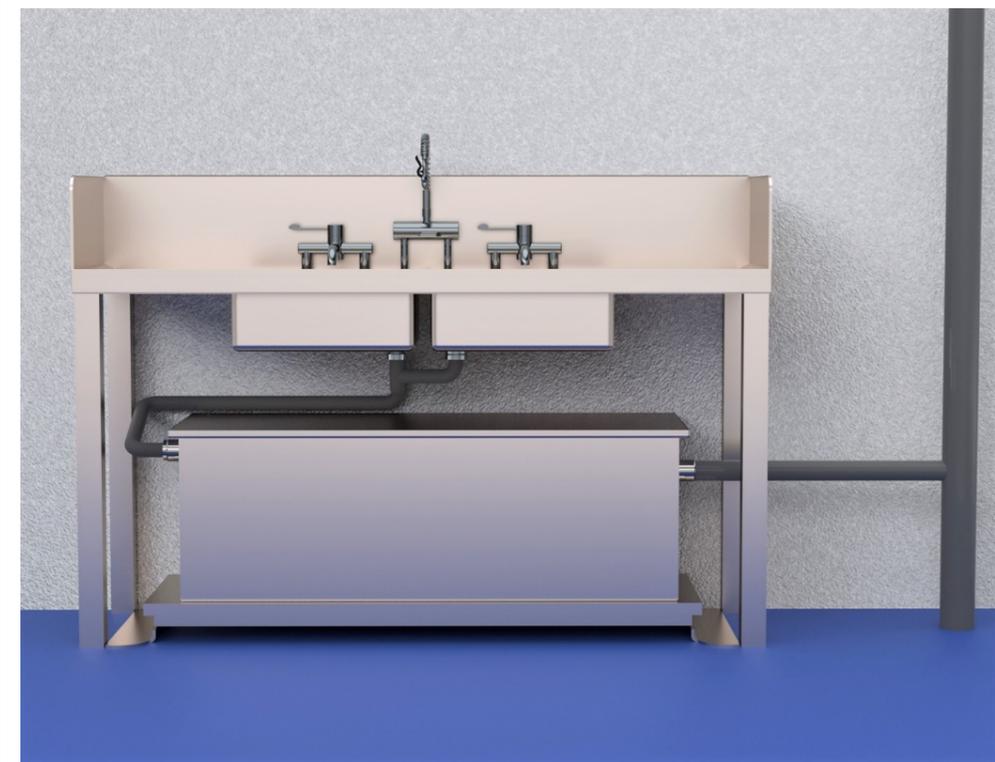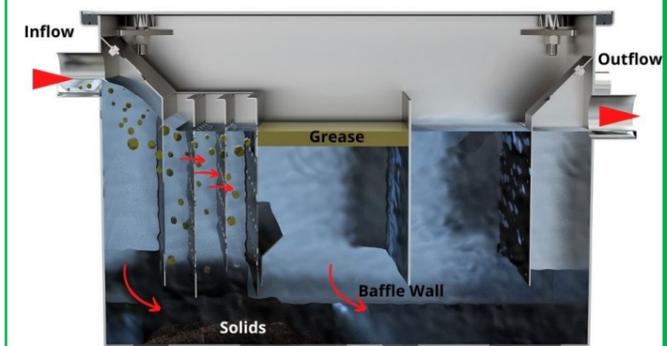

* Unit will be on the ground or sitting on the sink shelf

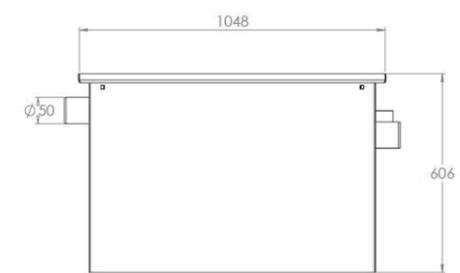

Example of NS 2

Kent Model	Nominal Size	Sludge Trap	Grease Capacity	Filled Volume	Length	Width	Height*	Pipe
GIKF 9050	1	100L	40L	121L	948	648	506	50
GIKF 9075	2	200L	80L	272L	1048	748	606	50

Specify: Kent GIKF9075 Freestanding Under Sink Grease Interceptor . Nominal Size NS2, 1048mm x 748mm x 606mm (h); Grease Capacity 80L; Sludge Capacity 200L. Grade 304 Stainless Steel. Lockdown Cover Non Trafficked.

* Amend underlined words to suit project

